Power Catalog – May 2016

POWER RESOURCE CENTER

FREE SHIPPING* ON POWER PRODUCTS
Jameco.com/FreeShippingClub

JAMECO FREE SHIPPING CLUB

JAMECO® Since 1974
ELECTRONICS

www.Jameco.com | 1-800-831-4242

FEATURED POWER PRODUCTS

RS Series Enclosed Single Output Switching Power Supplies

Enclosed Power Supplies on pages 15-17

This classic series from Mean Well is a highly reliable enclosed switching power supply that is suitable for critical applications. With short circuit, over load, and over voltage protections, they are ensured a long life and high efficiency with cooling by free air convection. Power your applications with this series now.

***Web Code: EPS**

- 100% full load burn-in test
- Withstand 300VAC surge input for 5 seconds
- Withstand 5G vibration test
- High operating temperature up to 70˚C
- LED indicator for power on
- Three-year warranty

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Load Reg. (%)	Line Reg. (%)	Efficiency (%)	1	10
1919043	RS-15-5	5V @ 3A	15	±1.5	±0.5	77	$9.49	$8.49
323282	RS-25-5	5V @ 5A	25	±1.0	±0.5	77	11.49	10.49
1919051	RS-15-12	12V @ 1.3A	15.6	±0.5	±0.5	81	9.49	8.49
323300	RS-25-12	12V @ 2.1A	25.2	±0.5	±0.5	79	11.49	10.49
323337	RS-35-12	12V @ 3A	36	±0.5	±0.5	81	12.95	11.95
323396	RS-50-12	12V @ 4.2A	50.4	±0.5	±0.5	81	13.49	11.95
323599	RS-75-12	12V @ 6A	72	±0.5	±0.5	81	16.95	15.49
323839	RS-150-12	12V @ 12.5A	150	±0.5	±0.5	83	24.95	22.49
323311	RS-25-24	24V @ 1.1A	26.4	±0.5	±0.5	84	11.49	10.49
323620	RS-75-24	24V @ 3.2A	76.8	±0.5	±0.5	85	16.95	15.49
323732	RS-100-24	24V @ 4.5A	108	±0.5	±0.5	84	23.95	21.95
323855	RS-150-24	24V @ 6.5A	156	±0.5	±0.5	86	24.95	22.49

RS-15

Regulated Switching Table-Top Power Supplies (3-Wire AC Input)

Table-Top Power Supplies on pages 6-8,10

For powering desktop or industrial applications, these table top power supplies are exactly what you need. With a wide range of brands and precise voltages, you can find the perfect type for your specific device.

- AC power cord not included. Recommend P/N 38050, pg 6

***Web Code: DDZ**

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
2224059	AD025DGAA1-J25	5VDC @ 5A	25	2.5mm x 5.5mm	4.3 x 2.0 x 1.2	$15.95	$14.49
2197927	DZ036DL120300G	12VDC @ 3A	36	2.1mm x 5.5mm	4.3 x 1.9 x 1.3	13.95	12.49
2218151	AD8180LF	12VDC @ 5A	60	2.5mm x 5.5mm	4.6 x 2.4 x 1.4	16.95	15.49
2208956	KPL-060F	12VDC @ 5A	60	2.1mm x 5.5mm	4.5 x 2.0 x 1.2	15.95	14.49
2197919	DZ036DL240150G	24VDC @ 1.5A	36	2.1mm x 5.5mm	4.3 x 1.9 x 1.3	13.95	12.49
2208948	KPL-060M	24VDC @ 2.5A	60	2.1mm x 5.5mm	4.5 x 2.0 x 1.2	15.95	14.49
1950913	KPL-060M-2.5	24VDC @ 2.5A	60	2.5mm x 5.5mm	4.8 x 2.4 x 1.4	19.95	17.95
2208892	GS120A24-HQU	24VDC @ 5A	120	2.5mm x 5.5mm	6.6 x 2.6 x 1.4	37.95	33.95
2218100	VAN90C-480B	48VDC @ 1.45A	70	2.1mm x 5.5mm	5.9 x 2.4 x 1.2	16.95	15.49

2197927

AC-to-DC Interchangeable Wall Adapters

Wall Adapters on pages 2-6

These interchargeable wall adapters are designed to be used anywhere you travel to. Whether it's the United States, Europe, Latin America or Australia, each location gives a different amount of voltage and current from their outlets. These interchangeable plugs are designed to give you the correct voltage and current flowing to your device to prevent it from being damaged. Check out our full array of choices and don't fly out of the country without one.

- Interchangeable AC plugs not included (see pg 4)

***Web Code: NBH**

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
228785	PSA11R-033	3.3V @ 2A	6	2.1mm x 5.5mm	3.3 x 1.8 x 1.3	$8.95	$7.95
2202790	TR10R050-1*	5V @ 1.6A	8	2.1mm x 5.5mm	2.8 x 1.7 x 1.3	6.95	6.25
2202896	PSA21R-090	9V @ 1.67A	15	2.1mm x 5.5mm	3.9 x 2.3 x 1.2	9.95	8.95
2138951	PSA11R-120	12V @ .83A	10	2.1mm x 5.5mm	2.8 x 1.8 x 1.2	8.95	7.95
2258689	PSAC12R-120-R	12V @ 1A	12	2.1mm x 5.5mm	2.8 x 1.9 x 1.2	15.95	14.49
228849	PSA21R-120	12V @ 1.67A	20	2.1mm x 5.5mm	3.9 x 2.3 x 1.2	14.95	13.49
2082345	GE12I24-P1J	24V @ .63A	15	2.1mm x 5.5mm	2.8 x 1.6 x 1.5	9.49	8.49

* AC plugs included

228785

Power Entry Filters

Power Entry Filters on page 12

Power entry modules allow connections to electronic equipment circuitry using quick connect tab terminals. Advantages for these products include efficient mounting, certified power components dealing with the AC powerline, and compact dimensions that only take up a small amount of space on the chassis or PCB. Line filters help attenuate EMI. AC inlets allow use of a detachable AC line cord to be plugged in the wall.

***Web Code: ACR**

Part No.	Mfr. Part No.	Description	Current (A)	Hipot (VDC)	Terminals	1	10	100
2114116	PLF-3PC	Line filter, metal case (PC mount)	3	250	Solder	$5.95	$5.39	$4.79
1811391	06A2D	Power entry module (snap-in)	4	2250	Faston	4.95	3.95	2.95
2114095	NEMA-5-2	AC power outlet, NEMA receptacles (snap-in)	15	125	Fork	.99	.85	.69
16652	JR101	AC power inlet, male (screw flanged)	15	250	Faston	1.09	.99	.79
147109	42R02	AC power inlet, male (snap-in)	15	250	Faston	.99	.89	.75
2095525	IEC-GS-1-100	AC power inlet, male w/sw. & fuse folder (snap-in)	15	250	Faston	2.95	2.75	2.49



2114095

Power up with Jameco Electronics!

There are lots of choices when it comes to power and Jameco offers a few thousand different options. Things like energy efficiency, footprint and price are critical in addition to the technical specifications. We make it easy to save money on power while fully recognizing that a cheap power solution can cost you many times more than the savings on the power supply itself.

We think having a catalog dedicated to power solutions is exactly the kind of thing you'll want to keep handy and after joining **Jameco's Free Shipping Club** every order will be shipped for free.

Learn more about selecting a power supply online at Jameco.com/PowerCenter. Get all the details on Jameco's Free Shipping Club at Jameco.com/FreeShippingClub.*

Don't see what you need? Write us at SuggestProducts@Jameco.com. Need help selecting the right power supply? Write us at Technical@Jameco.com. Have a large requirement you would like us to bid on? Send us an email at Quotes@Jameco.com. Or for all of the above just call us at 1-800-831-4242. We're always happy to talk power.

The Jameco Difference

Customer Service

We work hard to provide the best customer service in the industry. Our management team's first priority is listening and responding to customer feedback. You can email the management team directly at Management@Jameco.com with your feedback and expect a prompt and personal response.

Improved Shipping Options

Jameco has been hard at work expanding shipping options which for many have significantly reduced shipping costs. Whether you are looking for low pricing on air shipping or just want it as inexpensive as possible, Jameco's expanded options start at less than $4.

Selection

If you want great service, low prices and a reliable supplier of low-cost electronic components, turn to Jameco first. We carry house brands, factory over-runs and are franchised with over 200 name brands color-coded throughout the catalog. Look for our spec-by-spec, feature-by-feature comparison-shopping. Jameco has long standing relationships with manufacturers around the world, and we work hard to source a wide selection of value components.

3 LEVELS OF SAVINGS

NAME BRANDS	HOUSE BRANDS	SPECIAL BUY

Catalog Tools

Jump from catalog to website seamlessly with Jameco's exclusive Web Code. By simply entering the three character code into the Jameco.com search box you'll find more information, additional web-only products and the latest pricing and availability information. Don't search; simply step from catalog to the Website without missing a beat.

Enter the Web Code in the product search box

*Power Cords — Enter Web Code UBF

PayPal™ Jameco Now Accepts PayPal

CATALOG QUICK INDEX

Featured Products	Inside Front Cover,21,Back Cover
Brackets & Accessories	18
DIN-Rail Power Supplies	19,20
Encapsulated Power Converters	20
Enclosed Power Supplies	Inside Front Cover,15-17,21
High Voltage Power Supply	10
Interchangeable Wall Adapters	Inside Front Cover,4
LED Power Supplies	18
Medical Power Supplies	6,14,16
Open-Frame Power Supplies	14,Back Cover
Power Cables	10
Power Cords	6,10,12,13,Back Cover
Power Entry & Line Filters	Inside Front Cover,12
Power Jacks, Plugs & Adapters	9,10,21
Power Transformers	11
Miscellaneous Transformers	10,11
Table-Top Power Supplies	Inside Front Cover,6-8,Back Cover
Wall Adapters	Inside Front Cover,2-6,10,21

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro and ReliaPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2016 James Electronics. All rights reserved.

AC-to-AC Wall Adapters

Input: 120VAC @ 60Hz

Female

Male

Female Right Angle

Screw Terminals

★Web Code: ABQ

2202773

206439

Call for Additional OEM pricing. We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

Part No.	Manufacturer	Product No.	Output Rating Voltage (VAC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2082521	Arndt	5-2634	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	White	6'	0.4	UL/CSA	$1.95	$1.75	$1.49	$1.25
100061	ReliaPro	ACU090050	9	500	2.1mm x 5.5mm **F**	2.7 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2202773	Bogen	PI-41-43A	9	780	2.1mm x 5.5mm right angle **F**	2.4 x 2.0 x 1.6	Black	6'	0.6	UL/CSA	7.95	6.95	6.25	5.59
102234	ReliaPro	ACU090100	9	1000	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
157041	ReliaPro	ACU090100E8942	9	1000	2.5mm x 5.5mm **F**	2.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
2227444	ReliaPro	ADU090150	9	1500	2.1mm x 5.5mm **F**	2.9 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
112336	ReliaPro	ACU090150A2231	9	1500	2.5mm x 5.5mm **F**	2.5 x 2.2 x 2.0	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
101258	ReliaPro	ACU120050	12	500	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2179614	ReliaPro	ACU120050R	12	500	2.5mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	8.95	7.95	6.95	5.95
10081	ReliaPro	AD-1201000AU1	12	1000	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
100167	ReliaPro	ACU120100D0531	12	1000	2.5mm x 5.5mm **F**	3.2 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
10428	ReliaPro	ACU120100Z9121	12	1000	3.5mm **M**	2.6 x 2.4 x 2.0	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.29
2167576	Arndt	AM-121200A	12	1200	2.1mm x 5.5mm right angle **F**	3.2 x 2.1 x 1.9	Black	6'	0.9	UL/CSA	7.95	6.95	5.95	5.49
167151	ReliaPro	ADU120150	12	1500	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	11.95	10.95	9.95	8.95
307838	ReliaPro	ADU120160H4120	12	1600	2.5mm x 5.5mm **F**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	12.95	11.95	10.95	9.95
206404	ReliaPro	MGT1220	12	1670	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	9.95	8.95	7.95	7.29
2197581	ReliaPro	GPU48120200WA00	12	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.49
2227604	ReliaPro	GPU481202000WA0	12	2000	2.5mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.49
2197847	Arndt	A71235DC	12	3500	Stripped & tinned **(Table-Top style)**	3.9 x 2.7 x 2.2	Black	6'	2.1	UL/CSA	11.95	10.95	9.95	8.95
2138978	Arndt	JOD-48U-12A	13.5	1000	1.3mm x 3.5mm **F**	2.8 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	4.95	3.95	3.49	2.95
2202765	Arndt	240000000043	13.5	1000	2.1mm x 5.5mm **F**	2.8 x 2.2 x 1.8	Black	6'	0.6	UL/CUL	4.95	3.95	3.49	2.95
171408	ReliaPro	ACU140050	14	500	2.1mm x 5.5mm **F**	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.25
318684	ReliaPro	ACU140085	14	850	2.5mm x 5.5mm right angle **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	11.95	10.95	9.95	8.95
100108	ReliaPro	ADU160100	16	1000	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2227612	ReliaPro	ADU160100-2.5	16	1000	2.5mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2217748	Arndt	ZMCE-014	18	300	Stripped/tinned	2.3 x 1.6 x 1.4	Black	6'	0.5	UL/CUL	5.95	4.95	4.49	3.95
2217916	Arndt	218054	18	500	2.1mm x 5.5mm **F**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
2082142	Ault	308-2018	18	900	Screw terminals	1.9 x 2.2 x 2.0	Beige	—	0.7	UL	4.95	4.49	3.95	3.59
121216	ReliaPro	ADU180100	18	1000	2.1mm x 5.5mm **F**	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	11.95	10.95	9.95	8.95
2227621	ReliaPro	ADU180100-2.5	18	1000	2.5mm x 5.5mm **F**	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	11.95	10.95	9.95	8.95
2179622	ReliaPro	AFU180200	18	2000	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.1	Black	6'	1.7	—	12.95	11.95	10.95	9.95
87581	ReliaPro	ADU240050	24	500	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
206439	ReliaPro	MGT2420	24	830	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	10.95	9.95	8.95	7.95
140599	ReliaPro	ADU240100D5531	24	1000	2.1mm x 5.5mm **F**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2217721	Arndt	ZMCE-022	24	1000	2.5mm x 5.5mm **F**	3.2 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	6.95
10102	ReliaPro	ADU240100E0461	24	1000	3.5mm **M**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2100195	ReliaPro	GPU572401500WA00	24	1500	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95
2227639	ReliaPro	GPU572401500WA0	24	1500	2.5mm x 5.5mm **F**	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95
2227727	Arndt	MAS-02402000	24	2000	Stripped & tinned **(Table-Top style)**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	12.95	11.95	10.95	9.95
2197548	ReliaPro	GPU572402000WA00	24	2000	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	15.95	14.49	12.95	11.49
2205579	Arndt	MGT2450P	24	2100	Screw terminals	3.2 x 2.2 x 1.9	White	—	0.9	UL/CUL	12.95	11.95	10.95	9.95

AC-to-DC Regulated Switching Wall Adapters

★Web Code: CDZ

Call for Additional OEM pricing.
We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

◆ Polarity 1 (+)—•—(−) (center negative)
Polarity 2 (−)—•—(+) (center positive)
Female(F) Male(M)

USB Type-A Female

Female Straight

Female Right Angle

2138636

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
2138636	Emerson	SW013US-0500020US★	5	200	USB type-A F	100-240@50-60	2.3 x 1.8 x 0.9	Black	—	0.2	TUV/FCC	$2.95	$2.59	$2.25
2217730	Arndt	ZMCE-039★	5	1000	Stripped/tinned F **2**	100-240@50-60	2.3 x 1.3 x 1.0	Black	6'	0.2	UL/CUL/CEC	6.95	6.25	5.95
2218193	Arndt	MU05-J050100-A1★	5	1000	1.3mm x 3.5mm F **2**	100-240@50-60	2.6 x 1.3 x 1.5	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
252720	ReliaPro	S08AA05010001★	5	1000	2.1mm x 5.5mm F **2**	100-240@50-60	2.9 x 1.1 x 1.7	Black	6'	0.3	UL/CUL	9.95	8.95	7.95
2227735	ReliaPro	EDF0500150A1BA★	5	1500	1.3mm x 3.5mm F **2**	100-120@50-60	2.8 x 1.6 x 1.3	Black	6'	0.2	UL/CUL	7.95	6.95	6.25
2209158	CUI Inc	EPAS-101W-05★	5	2000	2.1mm x 5.5mm F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL	7.95	6.95	5.95
1940740	Mean Well CEC	GS12U05P1I	5	2000	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	4'	0.3	UL/CUL/CEC	10.49	9.49	8.49
2138741	ReliaPro	CP0520	5	2000	2.5mm x 5.5mm F **1**	100-240@47-63	3.0 x 1.1 x 1.6	Black	6'	0.4	UL/CUL/TUV	7.95	6.95	5.95
2188537	CUI Inc	EPAS-101W-05★	5	2000	2.5mm x 5.5mm right angle F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL	6.95	6.25	5.95
2217617	Seeed Studio	279011001	5	2100	USB type-A F	100-240@50-60	2.3 x 1.6 x 1.3	Black	—	0.2	UL/CUL/FCC	9.95	8.95	7.95
2258363	Arndt	GFP151U-0525	5	2500	2.1mm x 5.5mm F **2**	100-240@50-60	2.4 x 1.7 x 1.0	Black	6'	0.3	UL/CUL/CE	8.95	7.95	6.95
2138724	Jentec CEC	AF1805A★	5	2500	2.1mm x 5.5mm right angle F **2**	100-120@50-60	2.4 x 1.9 x 1.1	Black	6'	0.3	UL/CUL/CEC	7.95	6.95	5.95
2158549	ReliaPro CEC	S15AA05025001★	5	2500	2.5mm x 5.5mm right angle F **2**	100-240@50-60	3.0 x 2.2 x 1.3	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95

★Slimline CEC

Jameco carries the full line of Mean Well products. For additional Mean Well products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Wall Adapters (Continued)

★Web Code: CDZ

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50
1952863	Mean Well	GS18U05-P1J	5	3000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	$11.95	$10.95	$9.95
2135451	Open Peak	LFS054000D-8AS	5	4000	2.1mm x 5.5mm right angle F 2	90-132@47-63	3.3 x 2.0 x 1.5	Black	6'	0.4	UL/CUL/CEC	10.95	9.95	8.95
379623	Mean Well	GS25U05-P1J	5	4000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	12.49	11.49	10.49
2218206	Arndt	MU08A9075100-A1*	7.5	1000	1.3mm x 3.5mm F 2	100-240@50-60	2.6 x 1.3 x 1.5	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
2172931	ReliaPro	EA1006BU*	9	660	2.1mm x 5.5mm F 1	90-264@47-63	2.1 x 1.4 x 1.0	Black	6'	0.1	UL/FCC/CEC	8.95	7.95	6.95
2203741	Arndt	CYSC24-090100-P*	9	1000	2.5mm x 5.5mm F 2	100-120@50-60	2.4 x 1.9 x 1.3	Black	6'	0.3	UL/CUL/CEC	9.95	8.95	7.95
1952847	Mean Well	GS18U09-P1J	9	2000	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
380140	Mean Well	GS25U09-P1J	9	2780	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.49	11.49	10.25
2173124	ReliaPro	EA1030U†	9	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.5	UL/CUL/CEC	13.95	12.49	10.95
2121578	ReliaPro	ST-12500	12	500	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	8.95	7.95	7.49
2151101	Arndt	CNR2260	12	500	2.1mm x 5.5mm F 2	100-240@50-60	3.6 x 2.0 x 1.3	Black	6'	0.3	UL/CUL/CEC	5.95	4.95	4.49
2224155	Arndt	PS12V.75A5520PW*	12	750	2.5mm x 5.5mm F 2	90-240@47-63	2.9 x 1.6 x 1.2	Black	6'	0.2	UL/CUL/CEC	7.95	6.95	6.25
2224091	Arndt	AMS8-1200750SU-1*	12	750	2.5mm x 5.5mm F 2	100-120@50-60	2.9 x 1.6 x 1.1	Black	6'	0.2	UL/CUL/CEC	6.95	6.25	5.49
2224104	Arndt	3A-093WU12*	12	750	2.5mm x 5.5mm F 2	100-120@50-60	2.9 x 1.6 x 1.2	Black	6'	0.2	UL/CUL/CEC	6.95	6.25	5.49
2197863	Arndt	AMS8-1200750SU*	12	750	2.5mm x 5.5mm F 2	100-240@50-60	2.9 x 1.8 x 1.1	Black	6'	0.2	UL/CUL/CEC	7.95	6.95	6.25
2227436	Arndt	DSA-12G-12AUS-12120†*	12	1000	2.1mm x 5.5mm F 2	100-120@50-60	2.7 X 1.6 X 1.1	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
2210802	Arndt	HK-AD-120U100-US*	12	1000	2.1mm x 5.5mm F 2	100-120@50-60	2.0 x 1.8 x 1.1	Black	6'	0.2	UL/CUL/CEC	8.95	7.95	6.95
1940774	Mean Well	GS12U12-P1I	12	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.49	9.49	8.49
2121586	ReliaPro	ST-121A	12	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	11.95	10.95	9.95
2209262	Asian Power Devices	WA18G12U	12	1500	2.1mm x 5.5mm F 2	100-240@50-60	3.0 x 1.9 x 1.3	Black	4'	0.3	UL/CUL/CEC	9.95	8.95	7.95
1952855	Mean Well	GS18U12-P1J	12	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.2	UL/CUL/CEC	11.95	10.95	10.49
2082134	ReliaPro	ST-122A	12	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.4	UL/CUL/CEC	14.95	13.49	11.95
380156	Mean Well	GS25U12-P1J	12	2080	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	12.49	11.49	10.49
2173116	ReliaPro	EA1036U†	12	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	13.49	11.95	11.49
1952871	Mean Well	GS18U15-P1J	15	1200	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CEC	11.95	10.95	10.49
380173	Mean Well	GS25U15-P1J	15	1670	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	12.49	11.49	10.49
2173108	ReliaPro	EA1030CU†	15	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	13.95	12.95	11.95
380191	Mean Well	GS25U18-P1J	18	1380	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 1.2 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.49	11.49	10.49
1940803	Mean Well	GS12U24-P1I	24	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	10.95	9.95	8.95
1952898	Mean Well	GS18U24-PIJ	24	750	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	11.95	10.95	10.49
2121594	ReliaPro	ST-241A	24	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	12.95	11.95	10.95
1953698	ReliaPro	MPC2400107	24	1000	2.1mm x 5.5mm F 2	100-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	11.95	10.95	9.95
1953671	ReliaPro	MPC-2400107	24	1000	2.5mm x 5.5mm F 2	120-240@50-60	3.4 x 2.7 x 2.2	Black	6'	0.5	UL/CSA	14.95	13.49	11.95
380202	Mean Well	GS25U24-P1J	24	1040	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.49	11.49	10.49
2173095	ReliaPro	EA1030DU†	24	1250	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	13.95	12.49	10.95
2167613	ReliaPro	ST-242A	24	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	6'	0.3	—	15.95	14.95	13.95
380220	Mean Well	GS25U28-P1J	28	890	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.6	UL/CUL/CEC	12.49	11.49	10.49
2179391	ReliaPro	PA1024-360HU	36	670	2.5mm x 5.5mm F 2	90-264@47-63	2.7 x 1.8 x 1.3	Black	6'	0.3	UL/CUL/CEC	12.95	11.95	11.49
380244	Mean Well	GS25U48-P1J	48	520	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	12.49	11.49	10.49

†RFI filter on cord *Slimline CEC

AC-to-DC "Slim Line" Regulated Switching Wall Adapters

★Web Code: CBQ



Output connector: 2.1mm x 5.5mm F2 (center positive)

• 2-wire AC input • Output cord length: 6' • Color: black • Input volt.: 100 – 240VAC @ 47-63Hz • One-year warranty

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
251565	ReliaPro	3.3	1500	2.5x1.1x1.7	0.2	$9.95	$8.95	$7.95	$6.95
2173010	Phihong	5	400	1.9x1.4x0.9	0.1	4.95	4.49	3.95	3.59
252701	ReliaPro	5	500	2.9x1.1x1.7	0.3	8.95	7.95	6.95	6.25
2126125	OEM	5	800	1.9x1.6x0.9	0.1	6.95	5.95	5.49	4.95
252720	ReliaPro	5	1000	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
2211098	Phihong	5	1000	2.6x1.4x1.1	0.2	7.95	6.95	6.25	5.95
1940660	Mean Well	5	1000	2.6x1.3x1.9	0.2	9.95	8.95	7.95	7.25
252728	ReliaPro	5	1500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
210894	ReliaPro	5	2000	2.9x1.4x2.2	0.2	10.95	9.95	8.95	7.95
2217772	ReliaPro	5	2000	3.0x1.6x1.2	0.2	11.95	10.95	9.95	8.95
252736	ReliaPro	5	2500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
2224016	ReliaPro	5	3000	3.3x1.7x1.3	0.2	13.95	12.95	11.95	10.95
2145078	Arndt	6	500	2.5x1.7x1.1	0.3	7.95	6.95	5.95	4.95
1940678	Mean Well	7.5	800	2.6x1.3x1.9	0.2	9.95	8.95	7.95	7.25
252753	ReliaPro	9	500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
1940686	Mean Well	9	660	2.6x1.3x1.9	0.2	9.95	8.95	7.95	7.25
1950841	ReliaPro	9	1000	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 100
252779	ReliaPro	9	1200	2.9x1.3x2.2	0.3	$11.49	$10.25	$9.49	$8.95
252786	ReliaPro	9	1500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
252795	ReliaPro	12	250	2.5x1.1x1.7	0.2	8.95	7.95	6.95	6.25
2150758	Arndt	12	500	2.5x1.7x1.1	0.2	7.95	6.95	6.25	5.95
252808	ReliaPro	12	500	2.5x1.1x1.7	0.2	8.95	7.95	6.95	6.25
1940694	Mean Well	12	500	2.6x1.3x1.9	0.2	9.95	8.95	7.95	7.25
252816	ReliaPro	12	600	2.5x1.1x1.7	0.2	9.95	8.95	7.95	6.95
2208999	Arndt	12	1000	3.0x1.9x1.2	0.3	11.95	10.95	9.95	8.95
252824	ReliaPro	12	1000	2.9x1.3x2.2	0.3	12.95	11.49	9.95	8.95
252833	ReliaPro	12	1250	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
1950497	ReliaPro	12	2000	2.9x2.1x1.3	0.4	15.95	14.49	12.95	11.49
2215726	Arndt	12	2500	3.0x1.4x2.0	0.3	11.95	10.95	9.95	8.95
252904	ReliaPro	15	1000	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
252866	ReliaPro	24	500	2.9x1.3x2.2	0.3	11.95	10.95	9.95	8.95
2076341	ReliaPro	24	630	2.9x1.3x2.2	0.3	11.95	10.95	9.95	8.95
2208972	ReliaPro	24	1000	3.5x1.7x1.3	0.3	12.95	11.49	10.95	9.95

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Energy Star Worldwide Interchangeable AC-to-DC Regulated Switching Wall Adapters

Meets US and European Energy Star compliance. Approved for European high-efficiency power applications.

★Web Code: NBH

- Field changeable AC plug clips **(sold separately, unless noted)**
- Regulated output • Double insulated
- Input voltage: 90-264VAC @ 47-63Hz • Power-on LED
- Output connector: **2.1mm x 5.5mm female center positive;** (except where noted, see footnotes **, #, ✓, ## below)
- Load regulation: ±5% • Class B EMI • 6' black cord
- Applications: wireless communications, portable equipment, digital camera, peripherals and networking

229181

Shown w/o AC Plug Clip
AC Plug Clips Not Included

Phihong & Mean Well AC Plug Clips (below)

Part No.	Manufacturer	Product No.	Output Volt. (VDC)	Current (A)	Power (W)	Ripple (mVp-p)	Line Regulation	Efficiency (%)	Dimensions (L" x W" x H")	Pricing 1	10	50
228785	Phihong	PSA11R-033	3.3	2.0	6	50	±5%	70	3.3 x 1.8 x 1.3	$8.95	$7.95	$6.95
2202888	Phihong	PSA21R-033	3.3	3.0	10	50	±1%	70	3.9 x 2.3 x 1.2	8.95	7.95	6.95
2144809	Phihong	PSA08R-050†#	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	6.95	5.95	4.95
2202829	Phihong	PSA08R-050-1.3**	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	8.95	7.95	6.95
2202790	Cincon	TR10R050-1*	5	1.6	8	50	±1%	65	2.8 x 1.7 x 1.3	6.95	6.25	5.95
2197812	Cincon	TR10RO50 ✓*	5	1.6	8	50	±1%	65	2.8 x 1.7 x 1.3	7.95	6.95	6.25
2158240	Phihong	PSM11R-050 ##	5	2.0	10	100	±5%	70	2.8 x 1.7 x 1.2	7.95	6.95	5.95
2202853	Phihong	PSA10R-090	9	1.1	10	90	±1%	65	3.4 x 2.0 x 1.3	9.95	8.95	7.95
2202896	Phihong	PSA21R-090	9	1.67	15	90	±1%	70	3.9 x 2.3 x 1.2	9.95	8.95	7.95
2082311	Mean Well	GE18I09-P1J	9	2.0	18	100	±5%	75	3.2 x 1.7 x 1.6	12.49	11.49	10.49
2138951	Phihong	PSA11R-120	12	0.83	10	120	±1%	65	2.8 x 1.8 x 1.2	8.95	7.95	6.95
2227831	Phihong	PLA12R-120†	12	1.0	12	120	±5%	70	2.8 x 2.0 x 1.2	10.95	9.95	8.95
2258689	Phihong	PSAC12R-120-R††	12	1.0	12	120	±5%	80	2.8 x 1.9 x 1.2	15.95	14.49	12.95
2154986	Arndt	FW75550/12*	12	1.25	15	150	±5%	80	3.5 x 2.0 x 1.3	11.95	10.95	9.95
2210693	Asian Power Devices	WA-18H12§	12	1.5	18	120	±2%	80	3.0 x 1.9 x 1.4	12.95	11.95	10.95
228849	Phihong	PSA21R-120	12	1.67	20	120	±1%	70	3.9 x 2.3 x 1.2	14.95	13.49	11.95
2261061	Phihong	PSAA20R-120L6††	12	1.67	20	120	±5%	85	2.8 x 2.0 x 1.3	18.95	16.95	15.49
2227532	DVE	DSA-24CA-12*	12	2.0	24	120	±2%	80	3.0 x 1.9 x 1.6	14.95	13.49	11.95
228822	Phihong	PSA11R-150	15	.67	10	150	±5%	70	3.4 x 2.0 x 1.3	11.95	10.95	9.95
2082345	Mean Well	GE12I24-P1J	24	0.63	15	240	±3%	80	2.8 x 1.6 x 1.5	9.49	8.49	7.49

Input plugs: † Includes US AC plug clip only § Includes US and European plug clips * Kit includes US, UK, EU, AUS plugs †† Level 6 CEC
Output connectors: ** 1.3mm x 3.5mm female plug # 2.5mm x 5.5mm female plug ✓ 2.5mm x 5.5mm right angle female plug ## Mini USB plug

Phihong AC Plug Clips *(sold separately, required for above adapters)*

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
229155	RPA	US AC plug only	$1.25	$1.19	$1.09	$.99
229163	RPE	European AC plug only	1.25	1.19	1.09	.99
229171	RPK	United Kingdom AC plug only	1.49	1.35	1.19	1.09
2081422	RPS	Australia AC plug only	1.25	1.19	1.09	.99
229181	RPKIT	Kit includes US, EU, UK & AU clips (4)	4.79	4.39	3.95	3.49

Mean Well AC Plug Clips *(sold separately, required for above adapters)*

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	100
2082353	AC-Plug-US	US AC plug only	$1.19	$1.09	$.99	$.89
2082361	AC-Plug-EU	European AC plug only	1.19	1.09	.99	.89
2082370	AC-Plug-UK	United Kingdom AC plug only	1.39	1.25	1.09	.99
2082388	AC-Plug-AU	Australia AC plug only	1.19	1.09	.99	.89
2082396	AC-Plug-MIX	Kit includes US, EU, UK & AU clips (4)	4.59	4.19	3.79	3.39

AC-to-DC Regulated Linear Wall Adapters

★Web Code: WAZ

Call for Additional OEM pricing.
We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

1953639

Female

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	10	50	100
164101	ReliaPro	GPU410500500WD00	5	500	2.1mm x 5.5mm F 2	120 @ 60	3.1 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	$9.95	$8.95	$7.95	$6.95
1953612	ReliaPro	DDU050100	5	1000	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.2 x 1.8	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
168605	ReliaPro	DBU0501000	5	1000	2.5mm x 5.5mm F 2	120 @ 60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
190512	ReliaPro	DBU60020-H3570	6	200	2.1mm x 5.5mm F 2	120 @ 60	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	9.95	8.95	7.95	6.95
2138716	Arndt	D41-06-500R	6	500	2.1mm x 5.5mm F 1	120 @ 60	2.6 x 2.0 x 1.5	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
283573	ReliaPro	ADR-6V500MA-2.1	6	500	2.1mm x 5.5mm F 2	120 @ 60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	10.95	9.95	8.95	7.95
1953639	ReliaPro	DCU09050	9	500	2.1mm x 5.5mm F 2	120 @ 60	2.4 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
1953647	ReliaPro	GPU410900500WD00	9	500	2.5mm x 5.5mm F 2	120 @ 60	3.0 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
2227428	Arndt	MT12-Y090100-A1	9	1000	2.5mm x 5.5mm F 2	120 @ 60	2.6 x 1.5 x 1.3	Black	6'	0.2	UL/CUL	11.95	10.95	9.95	8.95
220898	ReliaPro	DCU120020	12	200	2.1mm x 5.5mm F 1	120 @ 60	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	6.25
162996	ReliaPro	DDU120050	12	500	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2224083	Arndt	HK-N109-U120-LH	12	750	2.5mm x 5.5mm F 2	120 @ 60	2.5 x 1.7 x 1.2	Black	6'	0.2	UL/CUL	8.95	7.95	6.95	5.95
170245	ReliaPro	RDU120100	12	1000	2.1mm x 5.5mm F 2	120 @ 60	3.2 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
1953663	ReliaPro	DCU1201000	12	1000	2.5mm x 5.5mm F 2	120 @ 60	3.3 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
2227410	Arndt	MT18-9120150-A1	12	1500	2.1mm x 5.5mm F 2	120 @ 60	2.6 x 1.8 x 1.2	Black	6'	0.2	UL/CUL	13.95	12.49	10.95	9.95
174861	ReliaPro	DFU240050	24	500	2.1mm x 5.5mm F 2	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95
174879	ReliaPro	DCU090025	24	500	2.5mm x 5.5mm F 2	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95

More AC-to-DC Wall Adapters listed on pages 2-3 & 5-6

AC-to-DC Unregulated Linear Wall Adapters

Input: 120VAC @ 60Hz

Call for Additional OEM pricing.

We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

◆ Polarity 1 (+) (−) (center negative)
Polarity 2 (−) (+) (center positive)
Female(F) Male(M)

★Web Code: UAP

2099921

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2179745	DVE	DV-6100-3508	6	100	2.1mm x 5.5mm F **1**	2.4 x 1.5 x 1.0	Black	6'	0.3	UL/CUL	$2.95	$2.59	$2.29	$1.95
2099551	Fuhue	UE-3560300D	6	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
101266	ReliaPro	DBU060050E3860	6	500	2.1mm x 5.5mm F **2**	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CUL	6.95	6.25	5.59	4.95
147707	ReliaPro	DBU060080C6962	6	800	2.1mm x 5.5mm F **2**	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
1953719	ReliaPro	DCU060100	6	1000	2.1mm x 5.5mm F **2**	2.5 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
220943	ReliaPro	DCU060120G2401	6	1200	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
2215460	Fujitsu	MA14L-2001-0012	9	200	1.3mm x 3.5mm right angle F **2**	2.4 x 1.7 x 1.5	Black	6'	0.4	UL/CSA	4.95	3.95	3.49	2.95
100845	ReliaPro	DBU090020E0850	9	200	2.1mm x 5.5mm F **2**	2.1 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.59
2138847	ReliaPro	D6300-01	9	200	2.5mm M **2**	2.2 x 1.7 x 1.4	Black	6'	0.4	UL/CSA	2.95	2.49	1.95	1.59
133891	ReliaPro	DBU090030C112	9	300	2.1mm x 5.5mm F **2**	2.0 x 1.5 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
189238	ReliaPro	DBU090030H4540	9	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	4.95	4.49
163628	ReliaPro	DCU090050Z7484	9	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
100853	ReliaPro	DCU090050E2961	9	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
236937	ReliaPro	DCU090050G6440	9	500	2.5mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	7.95	6.95	6.25	5.49
15561	ReliaPro	DCU090050A2011	9	500	3.5mm M **2**	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	7.95	6.95	6.25	5.49
202180	ReliaPro	DCU090060F2091	9	600	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
100175	ReliaPro	DCU090060Z6652	9	600	2.5mm x 5.5mm F **2**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
164929	ReliaPro	DDU090100C2550	9	1000	2.1mm x 5.5mm F **1**	2.7 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
364576	ReliaPro	DDU090100J0490	9	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2099921	ENG Electric	T48-9-1000D4*	9	1000	2.5mm x 5.5mm F **1** (UK plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	2.95	2.59	2.29	1.95
127505	ReliaPro	DDU090100	9	1000	2.5mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
100095	ReliaPro	DBU120020	12	200	2.1mm x 5.5mm F **2**	2.1 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
158043	ReliaPro	DBU120020E2261	12	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
2167226	Arndt	4292A	12	200	2.5mm x 5.5mm F **2**	2.3 x 2.1 x 1.6	Black	6'	0.5	UL/CSA	4.95	4.49	3.95	3.59
127976	ReliaPro	DCU120030D7161	12	300	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	6.25	5.49
2227743	Arndt	MW41-1230§	12	300	2.1mm x 5.5mm F **1/F 2**	2.6 x 1.8 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.25
114825	ReliaPro	DCU120050D4740	12	500	Stripped & tinned	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
15368	ReliaPro	DCU120050Z8698	12	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
2227840	DVE	DV-1250	12	500	2.1mm x 5.5mm F **2**	2.3 x 1.9 x 1.6	Black	12'	0.6	UL/CSA	6.95	5.95	5.49	4.95
2227858	Arndt	L4D-120050R	12	500	2.1mm x 5.5mm F **2**	2.3 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	6.95	5.95	5.49	4.95
102496	ReliaPro	DCU120050E8601	12	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
102277	ReliaPro	DCU120050UE2631	12	500	2.5mm x 5.5mm F **2**	2.5 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
202219	ReliaPro	DCU120070F2142	12	700	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.25
2258371	Arndt	MT20-21120-A00F	12	750	2.5mm x 5.5mm F **2**	2.7 x 1.7 x 1.2	Black	6'	0.2	UL/CUL	6.95	6.25	5.95	4.95
2188473	Motorola	MT20-21120-A04F	12	750	2.5mm x 5.5mm F **2**	2.7 x 1.7 x 1.2	Black	6'	0.2	UL/CUL/CEC	7.49	6.95	6.25	5.49
117479	ReliaPro	DDU120080E6451	12	800	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	6.25
2217799	Arndt	AD-1280G†	12	800	2.5mm x 5.5mm F **2** (medical grade)	3.2 x 2.2 x 1.9	Black	12'	1.3	UL/CUL	6.95	6.25	5.59	4.95
2158160	Arndt	GPU481200800WD00	12	800	2.5mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	6.95	5.95	5.49	4.95
129331	ReliaPro	DDU120080F2412	12	800	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	6.25
121232	ReliaPro	DDU120080F2271	12	800	3.5mm M **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	6.95	6.25
2202917	Nite Rider	D12-10-1000	12	1000	2.1mm x 5.5mm F **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	5.95	5.49	4.95	4.49
2215742	Arndt	T012LF1209*	12	1000	2.1mm x 5.5mm F **2**	3.0 x 1.6 x 1.4	Black	6'	0.2	UL/CUL/CEC	7.95	6.95	5.95	5.49
2215734	Arndt	MT12-Y120100-A1**	12	1000	2.1mm x 5.5mm F **2**	2.7 x 1.5 x 1.3	Black	6'	0.2	UL/CUL/CEC	7.95	6.95	5.95	5.49
2197484	ReliaPro	DDU120100	12	1000	2.1mm x 5.5mm F **2**	2.6 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	7.95	6.95	6.25	5.95
100870	ReliaPro	DDU120100Z7974	12	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	7.29
2211135	Fellows	A-48-628(R2)	12	1000	2.5mm x 5.5mm right angle F **2**	3.1 x 2.2 x 1.9	Black	6'	1.1	UL/CUL	5.95	5.49	4.95	4.49
2179770	Westell	MT12-4120100-A1**	12	1000	2.5mm x 5.5mm F **2**	2.9 x 1.6 x 1.2	Black	6'	0.2	UL/CEC	7.95	6.95	6.25	5.59
105478	ReliaPro	DDU120100Z2993	12	1000	2.5mm x 5.5mm F **2**	3.1 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
15392	ReliaPro	DDU120100E7302	12	1000	3.5mm M **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
196779	ReliaPro	DDU120120G0031	12	1200	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2192747	ReliaPro	MW48-1201250	12	1250	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.4	UL/CUL	6.95	6.25	5.59	4.95
203036	ReliaPro	DDU120150H4530	12	1500	2.1mm x 5.5mm F **1**	3.3 x 2.2 x 1.9	Black	6'	1.5	UL/CUL	12.95	11.49	9.95	8.95

* 240VAC 50Hz ** Slimline † 3 prong ground § Reversible polarity (±) CEC

More AC-to-DC Wall Adapters listed on pages 2-4 & 6

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

3 LEVELS OF SAVINGS
NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

JAMECO ReliaPro AC-to-DC Unregulated Linear Wall Adapters (Continued)

★Web Code: UAP

Input: 120VAC @ 60Hz

Call for Additional OEM pricing.

We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

◆ Polarity 1 ⊕—●—⊖ (center negative)
Polarity 2 ⊖—●—⊕ (center positive)
Female(F) Male(M)

123158

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 100
2218118	Netgear	AD661F**	12	1500	2.1mm x 5.5mm F **2**	3.0 x 2.0 x 1.4	Black	6'	0.3	UL/CUL/CEC	$9.95	$8.95	$7.95	$6.95
136881	ReliaPro	DDU120150K1960	12	1500	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	12.95	11.49	9.95	8.95
101291	ReliaPro	DDU120150	12	1500	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	12.95	11.49	9.95	8.95
2218003	ReliaPro	DFU120200R	12	2000	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	16.95	15.49	13.95	12.49
2224008	ReliaPro	DFU120200R	12	2000	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	16.95	15.49	13.95	12.49
308099	ReliaPro	DDU135100H3210	13.5	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
123932	ReliaPro	DDU140070Z7470	14	700	2.1mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25
190001	ReliaPro	DCU150050E3021	15	500	2.1mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	7.95	6.95	6.25	5.95
189982	ReliaPro	DCU150050E3031	15	500	2.5mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
191652	ReliaPro	DDU150100D7051	15	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2081713	DVE	DV-1790	17	900	2.5mm x 5.5mm F **2**	3.2 x 2.2 x 2.0	Black	6'	1.2	UL/CSA	2.95	2.59	2.25	1.95
2205261	ReliaPro	DDU180100H4550	18	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
2228017	Arndt	WP572018DG	18	1100	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.4	UL/CUL	9.95	8.95	7.95	6.95
206958	ReliaPro	DDU180100H4551	18	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
102285	ReliaPro	DDU240040Z7860	24	400	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.29	6.49
2192510	ReliaPro	DDU240050RS1160	24	500	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25
191556	ReliaPro	DDU240050E5852	24	500	2.5mm x 5.5mm F **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
139088	ReliaPro	DDU240050E9160	24	500	3.5mm M **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
2192641	Ault	P48240600A030G	24	600	2.1mm x 5.5mm F **2**	2.9 x 2.2 x 1.9	Black	6'	1.3	UL/CSA	7.95	6.95	5.95	4.95
168495	ReliaPro	DFU240080J3180	24	800	2.1mm x 5.5mm F **2**	2.9 x 1.9 x 1.6	Black	6'	0.4	UL/CUL/TUV	11.95	10.95	9.95	8.95
220960	ReliaPro	DFU240100G2300	24	1000	2.1mm x 5.5mm F **1**	3.4 x 2.7 x 2.2	Black	6'	1.6	UL/CUL	12.95	11.95	10.95	9.95
249113	ReliaPro	DFU240120/G8510	24	1150	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	10.95	9.95	8.95	7.95
199523	ReliaPro	DDU300050E9340	30	500	2.5mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	10.95	9.95	8.95	7.95
2167621	Seven Star	SS104*	1.5, 3, 4.5, 6, 7.5, 9, 12	500	0.7x2.3, 1.5x4, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male** (LED indicator)	3.3 x 2.0 x 1.9	Black	6'	0.8	—	4.95	3.95	3.49	2.95
123158	ReliaPro	900-100*	1.5, 3, 4.5, 6, 7.5, 9, 12	1000	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.7 x 2.2 x 2.5	Black	6'	0.9	—	11.95	10.95	9.95	8.95

*110/220VAC input voltage **Slimline

Power

GlobTek® AC-to-DC Medical Table-Top Regulated Switching Power Supplies

★Web Code: WBM

- **2.5mm x 5.5mm female center positive**
- Input voltage: 90-264VAC @ 47-63Hz
- Leakage current: 0.1mA max.
- Regulation (line & load): ±5%
- Isolation voltage: 4,000VAC • 3-wire AC input
- Ripple & noise: 1% or 100mV, whichever is smaller
- Cord lengths: DC: 6'; AC: not included use P/N 132011, pg 13
- Size: 2.9"L x 2.0"W x 1.6"H

Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing 1	Pricing 10	Pricing 50
2179606	TR9CB2500LCP	15.0	+6/2.5	$15.95	$14.49	$12.95
230683	TR9CE1250CP	15.0	+12/1.25	34.95	29.95	24.95
230798	TR9CI2100LCP	50.4	+24/2.1	59.95	53.95	47.95

★Interchangeable Power Supplies, Adapters and Tips — Enter Web Code NBH

Accessory Power Input Cords for Table-Top Power Supplies

★Web Code: UBF

189587

38050


1951123

Part No.	Ref. No.*	Description	Color	AWG	Certification	Cord Length	Wt. (lbs.)	Cord Type	1	10	50	100
189587	1	2-conductor power cord (Figure 8 style)	Black	18/2	UL/CSA	6'	0.3	SPT	$2.95	$2.69	$2.39	$2.19
38050	2	3-conductor power cord	Black	18/3	UL/CSA	6'	0.4	SVT	4.95	4.49	3.95	3.59
1953559	3	3-conductor flat power cord (Mickey Mouse™ style)**	Black	18/3	UL/CSA	6'	0.4	SPT-2	2.95	2.59	2.29	1.95
1951123	3	3-conductor round power cord (Mickey Mouse™ style)**	Black	18/3	UL/CSA	6'	0.4	SVT	2.95	2.59	2.29	1.95

*These reference numbers for "AC cord needed" for Table-Top Power Supplies on pages 7-8 **Ref #3 chose flat or round cable

More Power Cords on page 13

BEST SELLING MOTORS

Motors help set your applications in motion. Keep your projects moving with these best selling motors.

DC Motors

Part No.	Mfr. Part No.	Volt (V)	Speed (RPM)	Torque (g-cm)	1	10	100
2158442	RF-500TB-18280-R	3	2104	68.01	$2.95	$2.75	$2.49
2173044	RF-500TB-12560-R	6	2100	11	3.95	3.49	2.95
238473	RF370CA-15370	12	4840	25.3	3.49	2.95	2.75
206949	QJT-360S-14280	12	4930	44.5	3.49	2.95	2.75
232022	MS5N-1885-R	12	9820	53.5	3.49	2.95	2.75

Gearhead Motors

Part No.	Mfr. Part No.	Volt (V)	Speed (RPM)	Torque (g-cm)	1	5	25
155012	GH12-1926	12	2	6000	$24.95	$22.49	$19.95
155821	GH12-1830Y-P-R	12	4.5	4500	24.95	22.49	19.95
155839	GH12-1641T-L-R	12	20	3000	25.95	23.49	20.95
253471	38-004	12	120	1100	15.95	14.49	12.95
253446	38-001	12	600	350	17.95	15.95	14.49

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Unregulated Linear & Regulated Switching Table-Top Power Supplies

We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

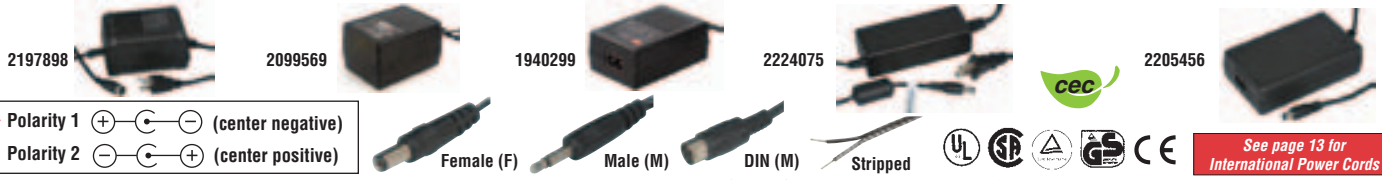

◆ Polarity 1 (center negative)
Polarity 2 (center positive)

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
2-Wire AC Input – Unregulated Linear Table-Top												★Web Code: TBE	
2155006	Lite-On	PB-1090-1L1	+12/0.75	2.5mm x 5.5mm F 2	120@60	9	No	3.2 x 2.2 x 1.9	6'/6'	1.1	UL/CUL	$6.95	$5.95
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6'/6'	1.5	UL	12.95	11.49
2211178	Arndt	SY-12200	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.6 x 2.1	6'/6'	2.1	UL/CUL	9.95	8.95
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.49
2197898	Arndt	MKD66123400	+12/3.4	5-pin DIN M	120@60	40	No	5.1 x 3.6 x 2.6	6'/6'	3.0	UL/CUL	9.95	8.95
2099569	Arndt	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6'/6'	1.3	UL	4.95	4.49
139096	ReliaPro	EHU240120	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	15.95	14.49
2197572	ReliaPro	EHU240200	+24/2.0	2.1mm x 5.5mm F 2	120@60	48	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	19.95	17.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: TTZ	
2179577	Delta	ADP-12GB	+5/2.5	2.5mm x 5.5mm F 2	100-240@50-60	12	No	3.4 x 2.2 x 1.2	6'/6'	0.5	UL/CUL	$9.95	$8.95
2258355	Mean Well	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	Yes	3.1 x 2.1 x 1.3	4'/1	0.5	UL/CUL/TUV/CE	9.95	8.95
1940299	Mean Well	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	90-264@47-63	15	Yes	3.1 x 2.1 x 1.3	4'/1	0.5	UL/CUL/TUV/CE	11.95	10.95
2203821	Arndt	AD8048	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	No	4.7 x 2.3 x 1.2	6'/6'	0.8	UL/CUL	10.95	9.95
2202870	Arndt	EADP-20NB	+5/4.0	2.1mm x 5.5mm F 2	100-120@50-60	20	No	4.4 x 2.1 x 1.3	6'/4'	0.7	UL/CUL/CEC	11.95	10.95
2203848	Arndt	G32DD-050400-A**	+5/4.0	2.1mm x 5.5mm F 2	100-120@50-60	20	No	4.0 x 2.2 x 1.3	6'/1	0.8	UL/CUL	11.95	10.95
2202626	Arndt	PS-2.1-5-4DAC#	+5/4.0	2.1mm x 5.5mm F 2	100-120@50-60	20	No	4.4 x 2.1 x 1.3	6'/6'	0.7	UL/CUL/CEC	10.95	9.95
2188570	Arndt	MPGS-U0241202000D2	+12/2.0	2.5mm x 5.5mm F 2	100-240@50-60	24	No	4.2 x 1.7 x 1.2	6'/1	0.5	UL/CUL/FCC	12.95	11.95
2227381	Delta	EADP-24MB	+12/2.0	2.5mm x 5.5mm F 2	100-240@50-60	24	No	4.5 x 1.9 x 1.2	6'/1	0.4	UL/CUL	13.95	12.49
2224075	Arndt	HK-HA-U12-LH#	+12/2.5	2.1mm x 5.5mm F 2	100-120@50-60	30	Yes	4.3 x 1.7 x 1.2	6'/6'	0.8	UL/CUL/CEC	14.95	13.49
2227401	Arndt	ADA017	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	5.1 x 2.2 x 1.2	6'/1	0.6	UL/CUL	14.95	13.49
2167445	ReliaPro	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.6 x 1.6 x 1.1	5'/1	0.4	UL/CUL/CE/CSA	16.95	15.49
2214230	Mean Well	GSM60B12-PIJ	+12/5.0	2.1mm x 5.5mm F 2	80-264@47-63	60	Yes	4.9 x 2.0 x 1.2	3'/1	0.7	UL/CUL/TUV/CE	21.95	19.95
2205456	Arndt	AD7212A	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.2 x 2.4 x 1.2	7'/1	0.7	UL/CUL/TUV/CE	17.95	15.95
1940547	Mean Well	GS25B24-P1J	+24/1.04	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.5	UL/CUL/TUV/CE	12.49	11.49
1707139	Mean Well	ES25B48-P1J	+48/0.52	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.1 x 2.1 x 1.3	6'/1	0.4	UL/CUL/TUV/CE	10.95	9.95
★3-9V Web Code: TTF				**3-Wire AC Input – Regulated Switching Table-Top – Single Output**								★12-14V Web Code: TTW	
196218	GlobTek	GT-21089-1305T3	+5/2.0	2.1mm x 5.5mm F 2	120-240@50-60	10	No	3.4 x 1.9 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	$17.95	$15.95
2227815	GlobTek	TR9CA2000LLP-Y-D**	+5/2.6	2.5mm x 5.5mm F 2	100-240@50-60	13	No	3.4 x 1.8 x 1.2	6'/2	0.5	UL/CUL/CE	12.95	11.95
1940387	Mean Well	GS18A05-P1J	+5/3.0	2.1mm x 5.5mm F 2	90-264@47-63	15	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	11.95	10.95
1940571	Mean Well	GS25A05-P1J	+5/4.0	2.1mm x 5.5mm F 2	90-264@47-63	20	Yes	3.7 x 2.1 x 1.4	4'/2	0.5	UL/CUL/TUV/CE	12.49	11.49
2227807	Sceptre Power	PS5050AP-LO5	+5/5.0	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	4.1 x 2.6 x 1.4	6'/6'	1.1	UL/CUL/CE	15.95	14.49
1952337	Mean Well	GS40A05-P1J	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2224278	Mean Well	GST40A05-P1J	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.6	†† (See below)	16.95	15.49
2224059	Sparkle Power	AD025DGAA1-J25	+5/5.0	2.5mm x 5.5mm F 2	90-264@47-63	25	Yes	4.3 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	15.95	14.49
2144956	ReliaPro	GQ65-060330-EI	+6/3.3	2.1mm x 5.5mm F 2	90-264@47-63	20	No	3.6 x 2.0 x 1.3	6'/3	0.3	UL/TUV/CE	12.95	11.49
206529	Mean Well	GS40A07-P1J	+7.5/5.34	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	1.5	UL/CUL/TUV/CE	16.95	15.49
2103118	Mean Well	GS60A07-P1J	+7.5/6.0	2.1mm x 5.5mm F 2	90-264@47-63	45	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.7	UL/CUL/TUV/CE	18.95	16.95
2173036	Phihong	PSA18U-090	+9/2.0	2.1mm x 5.5mm F 2	90-264@47-63	18	No	3.9 x 2.2 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	9.95	8.95
1940408	Mean Well	GS18A09-P1J	+9/2.0	2.1mm x 5.5mm F 2	90-264@47-63	18	Yes	3.7 x 2.1 x 1.4	6'/2	0.6	UL/CUL/TUV/CE	11.95	10.95
2102916	Mean Well	GS40A09-P1J	+9/4.5	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.6	UL/CUL/TUV/CE	16.95	15.49
1952361	Mean Well	GS60A09-P1J	+9/6.0	2.1mm x 5.5mm F 2	90-264@47-63	54	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	18.95	16.95
1954244	Mean Well	GS15A-3P1J	+12/1.25	2.1mm x 5.5mm F 2	90-264@47-63	15	No	3.9 x 2.3 x 1.3	6'/2	0.4	UL/CUL/TUV/CE	14.95	13.49
2227823	GlobTek	TR9CE1250-LCP-Y	+12/1.25	2.5mm x 5.5mm F 2	100-240@50-60	15	No	3.4 x 1.8 x 1.2	6'/2	0.5	UL/CUL/CE	15.95	14.49
228988	Phihong	PSA18U-120DIN	+12/1.5	3-pin DIN M	90-264@47-63	18	No	3.9 x 2.2 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	14.95	13.49
1940416	Mean Well	GS18A12-P1JU	+12/1.5	2.1mm x 5.5mm F 2	90-264@47-63	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	14.49	12.95
1940601	Mean Well	GS25A12-P1JU	+12/2.08	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	4'/6'	0.5	UL/CUL/TUV/CE	14.49	12.95
2197927	ReliaPro	DZ036DL120300G	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	4.3 x 1.9 x 1.3	6'/2	0.5	UL/CUL/CE	13.95	12.49
2129158	Sparkle Power	FSP040-DGAA1	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.0 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	15.95	14.49
1952345	Mean Well	GS40A12-P1J	+12/3.34	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2079357	Mean Well	GS40A12-P1M	+12/3.34	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	16.95	15.49

*See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cords (DC/AC)" column above for correct power cord
**Locking connector
Attached cord
†† UL/CUL/TUV/BSMI/CCC/FCC/CE
CEC

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

AC-to-DC Regulated Switching Table-Top Power Supplies

See page 12 for International Power Cords

We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

◆ Polarity 1 (center negative)
Polarity 2 (center positive)

Female (F)

Female Right Angle

DIN (M)

4-Pin Molex

2099294

2139006

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10
★12-14V Web Code: TTW	★15-24V Web Code: TTR	3-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)										★27-54V Web Code: TTT	
1940272	ReliaPro	GQ65-120416-E1	+12/4.16	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.5 x 1.9 x 1.4	4'/2	0.6	TUV(US)/CE	$15.95	$14.95
2129609	Phihong	PSA65U-120	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	No	5.9 x 2.8 x 1.5	3.3'/2	1.0	UL/CUL/CE	14.95	13.49
2208956	ReliaPro	KPL-060F	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.5 x 2.0 x 1.2	4'/2	0.9	UL/CUL/TUV/CE	15.95	14.49
1952370	Mean Well	GS60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 1.9 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	18.95	16.95
2224382	Mean Well	GST60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.7	†† (See below)	18.95	16.95
2218151	Net Gear	AD8180LF	+12/5.0	2.5mm x 5.5mm F 2	100-240@50-60	60	No	4.6 x 2.4 x 1.4	6'/2	0.6	UL/CUL/CE	16.95	15.49
2099420	Sparkle Power	AD060DBAEI-J25R	+12/5.0	2.5mm x 5.5mm F 2†	100-240@50-60	60	Yes	4.3 x 2.4 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	22.95	20.49
2227399	Channel Well	PAC080F	+12/6.66	2.5mm x 5.5mm F 2	100-240@50-60	80	Yes	5.8 x 2.5 x 1.5	4'/2	1.1	UL/CUL/CE	19.95	17.95
2078291	Mean Well	GS90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	90-264@47-63	80	Yes	5.7 x 2.3 x 1.3	4'/2	0.9	UL/CUL/TUV/CE	29.95	26.95
2223460	Mean Well	GST90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	90-264@47-63	80	Yes	5.7 x 2.4 x 1.3	3.3'/2	1.4	†† (See below)	29.95	26.95
2129211	Mean Well	GS120A12-R7B	+12/8.5	4-pin DIN M	85-264@47-63	102	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	43.95	39.95
2205165	ReliaPro	EA11011H-120	+12/10	4-pin DIN M	100-240@47-63	120	Yes	5.4 x 2.3 x 1.3	4'/2	2.4	UL/CUL/CB/CE	39.95	36.95
2122183	Mean Well	GS160A12-R7B	+12/11.5	4-pin DIN M	85-264@47-63	138	Yes	6.9 x 2.8 x 1.4	4'/2	0.94	UL/TUV/BSMI/CCC	52.95	47.95
2099294	Mean Well	GS220A12-R7B	+12/15	4-pin DIN M	90-264/127-370@47-63	180	Yes	8.3 x 3.4 x 1.8	3.3'/2	1.0	UL/CUL/TUV/CE	74.95	67.95
2139006	ENG Electric	3G-301DN13	+13.5/2.2	4-pin Molex	100-240@50-60	30	No	4.6 x 1.9 x 1.2	2'6"/3'	0.8	UL/CUL	5.95	4.95
1940619	Mean Well	GS25A15-P1J	+15/1.66	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	12.49	11.49
2202554	Phihong	PSA30U-150	+15/2.0	2.1mm x 5.5mm F 2†	100-240@47-63	30	No	4.4 x 2.4 x 1.4	6'/2	0.5	UL/TUV/CSA	11.95	10.49
221577	Mean Well	GS40A15-P1J	+15/2.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	3.3'/2	0.8	UL/CUL/TUV/CE	15.95	14.49
2171559	Mean Well	GS40A15-P1JU	+15/2.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/6'	0.6	UL/CUL/TUV/CE	16.95	15.49
1954295	Mean Well	GS60A15-P1J	+15/4.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	18.95	16.95
2078320	Mean Well	GS90A15-P1M	+15/6.0	2.5mm x 5.5mm F 2	90-264@47-63	90	Yes	5.7 x 2.3 x 1.3	3'3"/2	0.8	UL/CUL/TUV/CE	29.95	26.95
2154951	Mean Well	GS60A18-P1JU	+18/3.33	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	18.95	16.95
1940635	Mean Well	GS25A24-P1JU	+24/1.04	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	12.49	11.49
2172789	ReliaPro	EA1030D1	+24/1.25	2.1mm x 5.5mm F 2	100-240@47-63	30	Yes	3.8 x 1.7 x 1.2	6'/6'	0.4	UL/CUL/TUV/CE	11.95	10.95
2197919	ReliaPro	DZ036DL240150G	+24/1.5	2.1mm x 5.5mm F 2	100-240@50-60	36	No	4.3 x 1.9 x 1.3	6'/2	0.5	UL/CUL/CE	13.95	12.49
1952353	Mean Well	GS40A24-P1J	+24/1.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	6'/2	0.7	UL/CUL/TUV/CE	16.95	15.49
2208948	ReliaPro	KPL-060M	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.5 x 2.0 x 1.2	4'/2	0.9	UL/CUL/TUV/CE	15.95	14.49
1952214	Mean Well	GS60A24-P1J	+24/2.5	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.3	6'/2	0.7	UL/CUL/TUV/CE	18.95	16.95
1950913	ReliaPro	KPL-060M	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	4'/2	1.8	UL/CUL/TUV/CE	19.95	17.95
2078338	Mean Well	GS90A24-P1M	+24/3.75	2.5mm x 5.5mm F 2	90-264@47-63	90	Yes	5.9 x 2.3 x 1.2	4'/2	0.9	UL/CUL/TUV/CE	29.95	26.95
2208892	Mean Well	GS120A24-HQU#	+24/5.0	2.5mm x 5.5mm F 2	90-264@47-63	120	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	37.95	33.95
2135208	Mean Well	GS120A24-P1M	+24/5.0	2.5mm x 5.5mm F 2	85-264@47-63	120	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	43.95	39.95
2122212	Mean Well	GS160A24-R7B	+24/6.67	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/2	1.5	UL/CUL/TUV/CE	52.95	47.95
2099286	Mean Well	GS220A24-R7B	+24/9.2	4-pin DIN M	90-264@47-63	220	Yes	8.3 x 3.4 x 1.8	3.3'/2	2.4	UL/CUL/TUV/CE	74.95	67.95
1940643	Mean Well	GS25A28-P1J	+28/0.89	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.7	UL/CUL/TUV/CE	12.49	11.49
2202562	Phihong	PSA18U-480	+48/0.38	2.5mm x 5.5mm F 2†	100-240@50-60	18	No	3.9 x 2.1 x 1.2	6'	0.5	UL/CUL/CE	9.95	8.95
1952396	Mean Well	GS60A48-P1JU	+48/1.25	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.7	UL/CUL/TUV/CE	18.95	16.95
2218100	Netgear	VAN90C-480B	+48/1.45	2.1mm x 5.5mm F 2	100-240@50-60	70	No	5.9 x 2.4 x 1.2	6'/2	0.9	UL/CUL/CE	16.95	15.49
2122221	Mean Well	GS160A48-R7B	+48/3.34	4-pin DIN M	85-264@47-63	160	Yes	6.9 x 2.8 x 1.4	4'/2	0.94	UL/TUV/BSMI/CCC	52.95	47.95
3-Wire AC Input – Regulated Switching Table-Top – Double & Triple Output												★Web Code: TTN	
228988	Phihong	PSA18U-120	Din +12/1.5	3-pin DIN M	90-264@47-63	18	No	3.8 x 2.2 x 1.2	5'/2	1.1	UL/CUL/TUV	$14.95	$13.49
196270	ReliaPro	PSU25A13	+5/2.5, +12/1.0	4-pin mini DIN M	100-240@47-63	25	No	4.2 x 2.6 x 1.4	6'/6'	1.2	UL/CUL/TUV/CE	34.95	31.49
2125501	Sunny	SYS2062-3402	+5/2.0, +12/2.0	4-pin mini DIN M	100-240@50-60	34	Yes	4.7 x 2.4 x 1.5	3'/2	0.8	UL/CUL/TUV/CE	19.95	17.95
2220066	Arndt	SPU45E-201	+5/5.0, +12/2.0	4-pin mini DIN M	100-240@47-63	42	Yes	5.7 x 3.0 x 1.7	4'/2	1.1	UL/CUL/TUV/CE	24.95	22.49
221720	Mean Well	P25A14E-R1BU	+5/2.5, +15/0.3 -15/0.3	5-pin DIN M	90-264@47-63	25	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	29.95	26.95
190960	Mean Well	P25A13D-R1B	+5/2.5, +12/0.8 -12/0.3	5-pin DIN M	90-264@47-63	26	Yes	4.1 x 2.6 x 1.4	6'/2	1.1	CUL/TUV/CE	29.95	26.95
237367	Mean Well	P50A14E-R1B	+5/3.5, +15/1.2 -15/0.3	5-pin DIN M	90-264@47-63	42	Yes	5.8 x 3.0 x 1.7	4'/2	1.2	UL/CUL/TUV/CE	44.95	39.95
2217844	Arndt	T40-9312A	+5/5.0, +12/1.2 -12/0.3	6-pin DIN M	90-264@47-63	43	No	6.0 x 3.3 x 1.9	4'/2	1.2	UL/CUL/TUV/CE	29.95	26.95
221702	Mean Well	P50A13D-R1BU	+5/4.0, +12/2.0 -12/0.5	5-pin DIN M	90-264@47-63	50	Yes	5.7 x 3.0 x 1.7	4'/6'	1.5	UL/CUL/TUV/CE	49.95	44.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cords (DC/AC)" column above for correct power cord

† Right angle †† UL/CUL/TUV/BSMI/CCC/FCC/CE # HQU = C Tick Austria approval CEC

Switchcraft® Male & Female Power Jacks

★Web Code: BAM

Part No.	Mfr.	Product No.	Description Pin Dia. x OD	Dimensions H x W x D (mm)	Type/ Mount	Circuit/ Terminal	1	10	100
101194	ValuePro	PP024	1.3 x 3.5mm male	6.0 x 6.0 x 9.0	1/D	1/B	$.59	$.55	$.45
2202909	Arndt	163-0310	1.7 x 4.8mm male	41 x 10.3 Dia.	6/E	3/A	.79	.69	.59
2188625	Arndt	PJ2155	2.1 x 5.5mm male	10.9 x 9.0 x 14.3	2/D	1/A	.35	.29	.25
101179	ValuePro	PP014	2.1 x 5.5mm male	10.9 x 9.0 x 14.3	2/D	1/A	.45	.39	.35
101178	ValuePro	PP014G✓	2.1 x 5.5mm male	10.9 x 9.0 x 14.3	2/E	1/A	.49	.45	.39
137673	ValuePro	PP013	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	3/D	4/A	.45	.39	.35
151590	ValuePro	DPJ-02IA	2.1 x 5.5mm male	18.0 x 12.6 Dia.	4/C†	1/A	1.49	1.25	.99
151555	ValuePro	JX16183[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	5/C	1/A	1.75	1.59	1.39
281851	Switchcraft	722A[2]	2.1 x 5.5mm male	21.0 x 8.0 Dia.	7/C	1/A	4.95	4.49	3.95
159611	ValuePro	PJ1014A	2.1 x 5.5mm male	57.5 x 12.6 Dia.	6/E	3/A	1.95	1.75	1.49
2151136	ValuePro	HD2388C	2.1 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.75	1.49	1.25
2144690	ValuePro	L5225	2.1 x 5.5mm male	11.0 x 9.1 x 14.7	12/B	1/B	.35	.29	.19
2227209	Velleman	CD021-1**	2.1 x 5.5mm male	13 x 14.5 x 40	16/E	4/C	1.75	1.49	1.25
2153908	Velleman	CD021-5#**	2.1 x 5.5mm male	13 x 14.5 x 40	16/E	4/C	7.95	6.95	5.95
2210677	ValuePro	WTJ-020-37A	2.1 x 5.5mm male	14.5 x 9 x 10.7	2/D	1/A	.69	.65	.55
2168114	Adam Tech	ADC-002A-1	2.5 x 5.5mm male	11.0 x 9.0 x 14.3	2/D	1/A	.49	.45	.39
207714	ValuePro	HEC0470	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/B	.59	.55	.49
101187	ValuePro	PP014A	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/A	.59	.55	.49
151563	ValuePro	DPJ-026A[2]	2.5 x 5.5mm male	15.1 x 8.0 Dia.	5/C	1/A	1.95	1.75	1.49
159506	ValuePro	PJ1015A	2.5 x 5.5mm male	57.5 x 12.6 Dia.	6/E	3/A	1.49	1.35	1.19
202358	ValuePro	HD2388	2.5 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
281842	Switchcraft	712A[2]	2.5 x 5.5mm male	15.8 x 7.5 Dia.	7/C	1/A	3.49	2.95	2.65
2144745	Arndt	J25M	2.5 x 5.5mm male	11.1 x 8.9 x 13.4	13/D	1/B	.25	.19	.15
2227217	ValuePro	CD017-1**	2.5 x 5.5mm male	13 x 14.5 x 40	16/E	4/C	1.75	1.49	1.25
2153887	ValuePro	CD017-5#**	2.5 x 5.5mm male	13 x 14.5 x 40	16/E	4/C	7.95	6.95	5.95
2168122	Adam Tech	ADC-002A-2	2.5 x 5.5mm male	11.0 x 9.0 x 14.3	2/D	1/A	.59	.55	.49
1773996	Switchcraft	MDPC2ARA	2.5mm female	7.9 x 8.7 x 12.7	14/D	4/B	1.75	1.59	1.35
297035	Switchcraft	142A	3.5mm female	11.1 x 9.5 x 15.8	15/C	4/A	1.95	1.75	1.49
101143	ValuePro	PJ0352[1]	3.5mm female	10.0 x 10.0 x 18.5	9/C	4/A	.49	.45	.39
109496	ValuePro	PJ035PM[1]	3.5mm female	10.5 x 9.0 x 20.0	10/D	2/A	.49	.45	.39
165730	ValuePro	PJ0354R[1]	3.5mm female	15.5 x 5.9 Dia.	11/C	3/A	1.75	1.49	1.25
2183218	ValuePro	M6HDWR	Additional Panel Mounting Hardware indicated with [1]				.69	.59	.49
281852	Switchcraft	5/16-32HDWR	Additional Panel Mounting Hardware indicated with [2]				.69	.59	.49

† Center offset *Plastic **Screw terminals #5 pack ✓Panel mount groove

Mounting	Code
Panel	C
PCB	D
Panel & PCB	E
Cable	F

Terminals	Code
Solder eyelet	A
PC board	B
Screw term	C



Switchcraft® AC/DC Power Plugs & Adapters

★Web Code: MFP

Part No.	Mfr.	Product No.	Fig.	Description (Barrel) Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
71192	ValuePro	PP137	1	**F** plug, 1.3 x 3.5 x 9.5	4.1 x 12 (black)	$1.29	$1.15	$.89
191484	ValuePro	PP049W	1	**F** plug, 2.1 x 5.5 x 9.0	4.6 x 12.5 (white)	1.29	1.15	.89
2004890	ValuePro	PP049S	1	**F** plug, 2.1 x 5.5 x 9.5	4.5 x 12.5 (black)	1.29	1.15	.89
28760	ValuePro	PP049	1	**F** plug, 2.1 x 5.5 x 9.5 (P205)	4.1 x 12 (black)	1.29	1.15	.89
2201990	Arndt	CS1021-HP-12	3	**F** plug, 2.1 x 5.5 x 12	8.3 x 22 (black)	1.25	1.09	.95
2179358	ValuePro	27-1136A	7	**F** plug, 2.1 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	2.95	2.49	1.95
2145123	ValuePro	CS1021-A-12MM	1	**F** plug, 2.1 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
138587	ValuePro	PL-007	2	**F** plug, 2.1 x 5.5 x 12 (right angle)	2.8 x 11 (black)	.89	.79	.65
2227225	Velleman	CD022-1	9	**F** plug, 2.1 x 5.5 x 11 (screw term)	—	1.75	1.49	1.25
2153916	Velleman	CD022-5	9	**F** plug, 2.1 x 5.5 x 11 (screw term)	(5 pack)	7.95	6.95	5.95
190538	ValuePro	PP109S	1	**F** plug, 2.5 x 5.5 x 9.5	4.7 x 13 (black)	.89	.79	.65
28768	ValuePro	PP109	1	**F** plug, 2.5 x 5.5 x 9.5 (P206)	4.7 x 13 (black)	.89	.79	.65
2179366	ValuePro	27-1136B	7	**F** plug, 2.5 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	2.95	2.49	1.95
2145115	ValuePro	CS1021-B-12MM	1	**F** plug, 2.5 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
168242	ValuePro	PP109N	3	**F** plug, 2.5 x 5.5 x 14	3.9 x 22 (black)	.89	.79	.69
2099163	ValuePro	PL-008	2	**F** plug, 2.5 x 5.5 x 9.5 (right angle)	2.8 x 11 (black)	.95	.85	.75
2227233	Velleman	CD018-1	9	**F** plug, 2.5 x 5.5 x 11 (screw term)	—	1.75	1.49	1.25
2153895	Velleman	CD018-5	9	**F** plug, 2.5 x 5.5 x 11 (screw term)	(5 pack)	7.95	6.95	5.95
101135	ValuePro	JR-1020	4	**M** plug, — x 2.5 x 11 (mono)	4.3 x 13 (black)	.59	.49	.39
231176	ValuePro	AP-340	11	**M** plug, — x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	1.15	1.05	.95
231167	ValuePro	AP-343	10	**M** plug, — x 3.5 x 14 (stereo)	4.4 x 13 (metal)	1.49	1.25	.99
231160	ValuePro	PJ1035	5	**M** plug, — x 3.5 x 14 (mono)	4.8 x 13.5 (metal)	1.49	1.25	.99
101152	ValuePro	PJ1035	4	**M** plug, — x 3.5 x 14.5 (mono)	4.0 x 13 (black)	.99	.85	.75
2200954	ValuePro	JR1037	8	**M** plug, — x 3.5 x 14.5 (stereo)	4.5 x 12 (black)	1.95	1.75	1.49
2112989	ValuePro	JP1828C	6	Adapter, 2.1mm **M** to 1.3mm **F** (1.3"L)	—	2.25	1.95	1.75
1953591	ValuePro	DCJ2.1-DCP2.5	6	Adapter, 2.1mm **M** to 2.5mm **F** (1.4"L)	—	1.49	1.25	1.09
1953604	ValuePro	DCJ2.5-DCP2.1	6	Adapter, 2.5mm **M** to 2.1mm **F** (1.4"L)	—	1.49	1.25	1.09

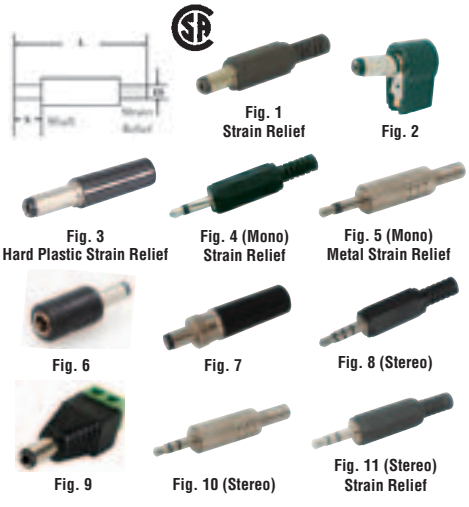

Call for Additional OEM pricing.

We are happy to change any listed wall adapter or table-top power plug to overmolding on a connector of your choice for $4.00 each. A 100 piece minimum order applies. Please call for details.

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

DC Cords with Pigtail – 6' length

*Web Code: MFP

- 24 AWG
- Color: black

Part No.	Cross Ref. No.	Fig.	Description (Barrel) ID x OD x L (mm)	1	10	100
2096763	DCCORD2.1	1	Plug, 2.1 x 5.5 x 12	$1.95	$1.75	$1.59
2210925	DCCORD2.1*	1	Plug, 2.1 x 5.5 x 9.5	2.95	2.59	2.29
2096771	DCCORD2.5	1	Plug, 2.5 x 5.5 x 12	1.95	1.75	1.59
2114600	6FT#245.5X2.1	2	Jack, 2.1 x 5.5 x 12	1.95	1.75	1.59
2114597	6FT#245.5X2.5	2	Jack, 2.5 x 5.5 x 12	1.95	1.75	1.59

*18 AWG wire

Fig. 1

Fig. 2

DC Extension Power Cables

Part No.	Cross Ref. No.	Description (Barrel) ID x OD x L (mm)	AWG	Color	1	10	100
2099147	DCEXTCORD2.1- 3FT	2.1F x 2.1M x 3' cable	18	Black	$2.49	$2.25	$1.95
2099121	DCEXTCORD2.1- 6FT	2.1F x 2.1M x 6' cable	18	Black	2.95	2.59	2.25
2099155	DCEXTCORD2.5- 3FT	2.5F x 2.5M x 3' cable	18	Black	2.49	2.25	1.95
2099139	DCEXTCORD2.5- 6FT	2.5F x 2.5M x 6' cable	18	Black	2.95	2.59	2.25

Automobile Fused Power Plugs with Cords

- Accepts .25" x 1.25" fuse

115002: Screw assembly with strain relief (no cord)

124760: 3' cord with pigtail

115002

124760

Part No.	Fuse	1	10	100
115002	5A/250VAC	$2.25	$1.95	$1.75
124760	3A/250VAC	2.49	2.25	1.95

Power Cord Adapters

2188545: Receptacle IEC plug C14 to Nema 5-15R

2188553: Receptacle CEE 7/7 to Nema 5-15R plug

2188545

2188553

Part No.	Cross Ref. No.	1	10	50
2188545	YL-3215	$3.95	$3.59	$3.29
2188553	YL-2215	3.95	3.59	3.29

30-Watt Switching Table-Top Power Supply

- **Output voltage: 5VDC to 12VDC in 1V increments**
- Output connectors: 2.5mm & 3.5mm **male**, 1mm x 3mm,1.35mm x 3.5mm, 1.5mm x 5mm, 1.7mm x 4mm, 2.1mm x 5mm & 2.5mm x 5mm **female**
- Stabilized outputs, low ripple & interference
- High efficiency, low energy consumption
- LED power indicator
- Input voltage: 100-240VAC @ 50/60Hz
- Short-circuit, overload protection

Includes: AC power cord

Part No.	Mfr. Part No.	Output Current	Size (L x W x H)	1	5	25
2158354	PSSE13U	1.5A to 4A	3.5" x 1.8" x 1.2"	$39.95	$35.95	$31.95

5VDC @ 0.5, 1 & 2A USB Wall Adapters

- Works with digital camera, cell phones, PDA, MP3 and other USB devices
- Flip up prongs
- UL FCC approved
- Input voltage: 100-240VAC @ 50/60Hz
- Cable and tips use P/N 2081625 (see Web)

2197644

2227786

Part No.	Mfr. Part No.	Output Curr.	Size (H" x W" x D")	1	10	50	100
2197644	FEF0500050AIBU	0.5A	2.2 x 1.5 x 1.1	$4.49	$3.95	$3.59	$3.29
2210888	1128	1A	2.6 x 1.3 x 1.5	5.95	4.95	4.49	3.95
2227786	XA1005-2U	2A	2.7 x 1.7 x 1.0	9.95	8.95	7.95	6.95

6kV-7.4kV High Voltage Power Supply

MADE IN USA

- Input voltage range: 113VAC to 132VAC
- Input lead wires: 22 AWG UL1015, 7.5"L; AC hot (black), AC COM (white), HV RTN (green)
- Output voltage: 6.0kV to 7.4kVA
- Output lead wires: 22 AWG UL3239, 10" (pink)
- UL94V-0 rated encapsulant filled epoxy
- Size: 3.0"L x 1.2"W x 1.0"H

Part No.	Mfr. Part No.	Description	1	10	50	100
2100136	CS2080A3	High voltage power supply	$4.95	$3.95	$3.49	$2.95

500 to 2000VA Variable Transformers

Variable transformers are suitable for changing the brightness of a room, speeds of electric motor, or other testing systems in diverse conditions.

- Input: 110VAC or 220VAC
- Power: 500, 1000 or 2000VA
- Output: 0-240VAC
- Banana/screw input terminals
- Universal US/European output plugs
- Lighted on/off power switch

121276

Part No.	Fuse	Size (W" x D" x H")	Wt. (lbs.)
121276	3A/250V (P/N 69439)	5.3 x 7.3 x 7.0	10.4
129008	5A/250V	9.4 x 6.5 x 7.7	14.8
152582	10A/250V (P/N 69462)	9.0 x 7.0 x 7.7	19.8

Part No.	Description	1	5
121276	500VA transformer	$129.95	$119.95
129008	1000VA transformer	169.95	154.95
152582	2000VA transformer	224.95	199.95

*AC Power Cords — Enter Web Code UBF

*Variable Transformers — Enter Web Code MAR

Transformer Isolation

- Output: 120VAC/4A, 60Hz
- Input: 110VAC 60Hz, 1800VA
- Primary:
  Current: 14 amps fuse
  Direct AC#1:
  110VAC 60Hz, 900VA
  Direct AC#2:
  110VAC 60Hz, 900VA
- Secondary: Current: 7 amps fuse
  Isolated AC#1: 110VAC 60Hz, 450VA
  Isolated AC#2: 110VAC 60Hz, 450VA
- Dimension: 5"L x 6"W x 9"H

Part No.	Mfr. Part No.	1	5	25
2214336	GRP-1200	$99.95	$89.95	$84.95

EMI Suppression Cores with Case

Reduce Electromagnetic Interference (EMI) with a snap of these suppression cores around a power cord or data cord. Easy to install and an affordable way to reduce EMI without redesigning your product.

218174

- Impedance at 100MHz between 75-225Ω min.
- Color: black

Part No.	InDia.	OutDia.	Length	1	10	100
218174	.20"	.64"	1.15"	$1.25	$.99	$.75
217842	.34"	.78"	1.40"	1.49	1.25	.99
2202600	.38"	.87"	1.34"	1.25	.99	.75
2081810	.38"	1.0"	0.65"	1.25	.99	.75

BEST SELLING FANS

Fans help cool down your applications. Keep your projects running at optimum condition with our best selling fans.

DC Fans

Part No.	Mfr. Part No.	Volt (V)	Size (mm)	Air Flow (CFM)	1	10	50
2133915	AD0412MX-G70	12	40x40x10	5.7	$4.95	$4.49	$3.95
139602	AD0512HS-D71-LF	12	52x52x15	12	8.95	7.95	6.95
688597	3110GL-B4W-B19-PA1	12	80x80x25	24.7	5.95	5.35	4.79
1955010	3110KL-04W-B40	12	80x80x25	35.3	6.95	6.25	5.59
1952791	4715KL-04W-B46	12	120x120x38	118	7.95	6.95	6.25
136161	JF0825B2H-005-065R	24	80x80x25	38.74	9.95	8.95	7.95

AC Fans

Part No.	Mfr. Part No.	Volt (V)	Size (mm)	Air Flow	1	10	50
300557	UF80B11SWH-R	120	80x80x25	24 CFM	$13.95	$12.95	$11.95
106586	CMWLTHFP-108-1-S1/T-R	120	120x120x38	105 CFM	12.95	11.95	10.95
1707163	SP101A-1123HBL-GN	120	120x120x38	107 CFM	15.95	14.49	12.95
2125931	FP-108-1	120	120x120x38	112 CFM	13.95	12.95	11.49
102884	SP100A-1123XBT-R	120	120x120x38	117 CFM	17.95	15.95	14.49
212582	UF15PC11BWH-R	120	172x150x51	226 CFM	36.95	34.95	32.95

International Step-Up & Step-Down Transformers

*Web Code: RAL

Part No.	Cross Ref. No.	Fig.	Type	Volt Step	Primary Voltage	Secondary Voltage	Watts (VA)	Dimensions H"	W"	D"	Wt. (lbs.)	Pricing 1	5	25
221331	GIS-500	A	Isolation	—	120VAC	120VAC	500	4.69	3.75	6.00	16.0	$89.95	$79.95	$69.95
85016	GPC1003	B	Auto	Down	220VAC	120VAC	300	3.50	3.05	3.95	4.8	49.95	44.95	39.95
111851	GPC1005	B	Auto	Down	220VAC	120VAC	500	3.99	3.60	4.84	8.5	59.95	54.95	49.95

Output Receptacle



Fig. A Plug


Fig. B Plug

Quick-Connect Power Transformers

- Input voltage: 120/230VAC, 50-60Hz
- Terminals: quick-connect, solder

*Web Code: BAN

Part No.	Product No.	Triad Cross*	Input Voltage	Output Voltage	Watts (VA)	Size of Connect	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
101864	XFR2424Q	FD724	120/230VAC	24VCT @ 2.4A	57.6	0.141"	2.10	2.70	2.29	1.7	$10.95	$9.49	$8.95
104417	XFR3615Q	FD736	120/230VAC	36VCT @ 1.5A	54.0	0.141"	2.30	2.70	2.30	1.8	19.95	18.49	16.95

*Triad cross is for reference only



101864



Power Transformers (7.6 Watts to 288 Watts)

*Web Code: PTL

Power transformers have both single and dual-voltage inputs and center-tapped outputs. This makes them the perfect choice for power supply design or for use in transformer, rectifier and filter circuits.

- Primary: 120VAC or 120/230VAC, 50-60Hz

29226





120/230VAC 50-60Hz
Fig. 1



120VAC 50-60Hz
Fig. 2



120VAC 50-60Hz
Fig. 3



120VAC 50-60Hz
Fig. 4

Part No.	Product No.	Triad Cross#	Primary Color Code			Watts (VA)	Secondary Voltage	Secondary Color Code			Lead Type	Fig.	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
105524	XR082-91-R	—	Black	White*	Red	9.0	4.5VCT @ 1A	Blue	Black*	Blue	Wire	1	1.82	2.43	1.67	0.7	$11.95	$10.95	$9.95
102163	XFR6102	F314X	Black	Yellow*	Red	7.6	6.3VCT @ 1.2A	White	Black*	White	Wire	1	1.84	2.40	1.67	0.8	10.95	9.95	8.95
221400	P-8657	F218X	Black	—	Black	24.0	12VAC @ 2A	White	—	White	Wire	2	1.89	2.75	1.99	1.3	11.95	10.95	9.95
221356	P-8658	F219X	Black	—	Black	48.0	12VAC @ 4A	White	—	White	Wire	2	2.25	4.00	2.63	2.3	12.95	11.95	10.95
2188502	53260	—	Red	—	Green	36.0	12/5VCT @ 3A	Purple	Multi	Gray	Wire	4	2.36	2.34	1.94	1.3	8.95	7.95	6.95
104387	XFR1225Q	FD612	—	—	—	31.5	12.6VCT @ 2.5A	—	—	—	—	1	1.75	2.33	2.00	1.3	12.95	11.95	10.95
29226	XFR122	F44X	Yellow	—	Yellow	25.2	12.6VCT @ 2A	Blue	Red*	Black	Wire	3	2.41	2.79	1.99	1.5	13.95	12.49	10.95
102155	XFR1220	F344X	Black	Yellow*	Red	25.2	12.6VCT @ 2A	White	Black*	White	Wire	1	2.35	2.32	1.97	1.5	13.95	12.49	10.95
149771	XFR1240	F3181U	Black	Red*	Yellow	50.4	12.6VCT @ 4A	White	Black*	White	Wire	1	2.45	3.20	2.25	2.2	13.95	12.49	10.95
102121	XFR124	F181U	Black	—	Black	50.4	12.6VCT @ 4A	White	Black*	White	Wire	3	2.45	3.21	2.26	2.7	14.95	13.49	10.95
105532	XFR1810	—	Blue	Red*	Black	18.0	18VCT @ 1A	Yellow	Black*	Yellow	Wire	1	2.20	2.81	1.99	1.2	11.95	10.95	9.95
149957	XFR1820	—	Black	Red*	Yellow	36.0	18VCT @ 2A	White	Black*	White	Wire	1	2.25	3.15	2.71	1.8	12.95	11.95	10.95
112513	XFR242N	F229X	Black	—	Black	48.0	24VAC @ 2A	White	—	White	Wire	2	2.33	3.16	2.28	1.8	13.95	12.49	10.95
221382	P8396	—	Black	—	Black	9.6	24VCT @ 0.4A	White	Black*	White	Wire	3	1.63	2.80	1.97	0.6	10.95	9.95	8.95
102112	XFR2410	F346X	Black	Yellow*	Red	24.0	24VCT @ 1A	White	Black*	White	Wire	1	2.41	2.80	1.99	1.5	11.95	10.95	9.95
221373	P-8662	F192X	Black	—	Black	48.0	24VCT @ 2A	White	Black*	White	Wire	3	2.44	3.60	2.23	2.3	13.95	12.49	10.95
221365	P-8663 †	F193U	—	—	—	96.0	24VCT @ 4A	—	—	—	Lug	3	2.81	2.94	4.00	4.0	25.95	23.95	21.49
149797	XFR2820	F3185U	Black	Red*	Yellow	56.0	28VCT @ 2A	White	Black*	White	Wire	1	2.45	3.22	2.26	2.3	13.95	12.95	10.95

* Center tap # Triad cross is for reference only † Solder terminal

*Audio Transformers — Enter Web Code SAJ
*Variable Transformers — Enter Web Code MAR
*DC Power Plugs & Adapters — Enter Web Code MFP

320VA Variable AC Transformer

- Input voltage: 110VAC @ 50-60Hz
- Max. current: 2.5A
- Matching input/output terminals: P/N 103668 & 109112 (disconnect .25" solderless terminals), see Web
- Panel mount
- One-year warranty
- Shaft length: 0.5"

Includes: 3 disconnect .25" solderless terminals

Part No.	Cross Ref. No.	Weight	Size (Dia. x H)	1	5	25
149324	PSV-203-R	2.5 lbs.	2.8" x 2.1"	$64.95	$59.95	$54.95

PC Mount Modem Coupling Transformer

- Core type: EI-14
- Insulation resistance: 100MΩ
- ±20% impedance matching and DC resistance matching
- Hipot tested: 1000VAC
- Vacuum wax impregnated



Part No.	Cross Ref. No.	Impedance (Ω) Primary	Secondary	Resistance (Ω) Primary	Secondary	Pricing 1	10	100
125357	XFR6006A14	600CT	600CT	65	55	$4.49	$3.95	$3.75

PC Mount Audio Transformer

- Impedance matching: 10% over frequency range
- 6-pin PC mount
- Output: 100mW
- Impedance (Ω): 600CT/600CT
- Primary DC Unbalance: 15mA



Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	10	100
630459	TY-145P	13/16" x 9/32" x 5/8"	$5.95	$5.49	$4.49

Audio Transformer

*Web Code: SAJ

- 300Hz to 3.4kHz
- Primary turns: 11486; Secondary turns: 1
- 200mW power rating



Part No.	Mfr. Part No.	Secondary Impedance	Primary Impedance	1	10	100
2210511	42TM013-RC	8Ω	1kΩ	$3.95	$3.59	$3.29

*For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320)

ADAM TECH · corcom · SCHURTER

Fig. 1 (Faston)

Fig. 2



Fig. 3 (Right Angle)

Fig. 4

Fig. 5

Fig. 6



Fig. 7 (6-32 Panel Mount)

Fig. 8



Fig. 9



Fig. 10



Fig. 11

Fig. 12

Fig. 13

Fig. 14

Fig. 15



Fig. 16

- Rated voltage: 115/250VAC • Operating frequency: 50/60Hz
- Hipot rating (one minute) line to ground: 2250VDC; line to line: 1450VDC

EMI Power Entry Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.20mA @ 250VAC 50Hz: 0.40mA

EMI Line Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.25mA; 1.0mA (10000pF) @ 250VAC 50Hz: 0.45mA; 2.0mA (10000pF)

***Web Code: ACR**


Fig. 17

Fig. 18



Fig. 19



Fig. 20

Part No.	Mfr.	Product No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.) A	B	C	D	Pricing 1	10	100
1951529	Delta	01DEEG3V	Power entry filter, rt. angle (screw flanged)	3	1	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	$.79	$.69	$.59
1172613	Tyco	1EGG1-2	Pwr entry filter, straight, fused (screw flanged)	1	1	2250	Faston	0.25"	UL/CSA/VDE	1.62	1.29	1.44	1.27	.69	.59	.49
2189599	Adam Tech	PLF-1DZ2KR	Pwr entry filter, w/ fuse & switch (screw flanged)	2	1	250	Faston	0.25"	UL/CSA/VDE	1.97	2.56	1.58	1.58	8.95	7.95	6.95
2178523	Schurter	5110.0343.1	Power entry filter, straight (snap-in)	4	3	2250	Faston	0.25"	UL/CUL	1.42	0.91	1.19	0.80	1.95	1.75	1.49
2114116	Adam Tech	PLF-3PC	Line filter, metal case (PC mount)	5	3	250	Solder	0.039"	UL/CSA/VDE	0.984	0.984	0.787	—	5.95	5.39	4.79
2189581	Adam Tech	PLF-3DZ2KR	Pwr entry filter, w/ fuse & switch (screw flanged)	2	3	250	Faston	0.25"	UL/CSA/VDE	1.97	2.56	1.58	1.58	5.95	5.49	4.95
2217879	Schaffner	FH365-4/05	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.30	1.10	1.26	1.40	1.09	.99	.89
1954720	Delta	04BEEG3S	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.26	1.19	1.26	1.40	2.95	2.59	2.29
1811391	Delta	06A2D	Power entry module (snap-in)	6	4	2250	Faston	0.25"	UL/CSA/VDE	2.65	2.50	1.06	1.11	4.95	3.95	2.95
1951570	Delta	05DRDG3S (5ER7)†	Power entry filter, 6-32 threaded panel mount	7	5	2250	Faston	0.25"	UL/CSA/VDE	3.15	1.97	1.28	1.58	2.59	2.29	2.09
2114124	Adam Tech	PLF-6DZ2KR	Pwr entry filter, strght, fuse & sw. (scrw flngd)	9	6	250	Faston	0.25"	UL/CSA/VDE	1.968	2.559	2.394	1.154	9.95	8.95	7.95
1951588	Delta	06DEEG3V	Power entry filter, right angle (screw flanged)	3	6	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	1.49	1.25	1.09
2197871	Delta	06BENG3G	Power entry filter, male (snap-in)	8	6	2250	Faston	0.32"	UL/CSA/VDE	0.30	1.90	1.10	1.70	5.95	4.95	3.95
1172672	Corcom	IVB3	Line filter (flange mount)	17	10	2250	1.5" Wire	Wire	UL/CSA/VDE	0.96	1.82	0.66	2.53	4.95	3.95	2.95
2178507	Arndt	6100-4115	AC power inlet, male (snap-in)	14	10	250	Solder	0.14"	UL/CSA/VDE	1.19	0.91	1.06	0.77	.29	.25	.19
117445	ValuePro	0717#	AC power inlet, male w/ fuse chamber (snap-in)	15	10	250	Faston	0.187"	UL/CSA/VDE	1.18	1.30	1.05	1.20	1.95	1.79	1.59
265528	ValuePro	WS-044#	AC power inlet, male w/ fuse chamber (screw)	16	10	250	Faston	0.187"	UL/CSA/VDE	1.40	1.28	1.06	1.21	1.75	1.49	1.25
2197880	Delta	10DRCS5	Power entry filter (flange mount)	17	10	2250	Threadpost	0.164"	UL/CSA/VDE	3.87	1.52	2.94	1.21	5.95	4.95	3.95
2189521	Adam Tech	IEC-GS-1-150	Pwr entry filter, w/ fuse & switch (snap-in)	18	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	1.06	1.83	2.95	2.75	2.49
2189564	Adam Tech	NEMA-5-1-A	AC pwr inlet, NEMA fem, angled GND pin (snap-in)	10	15	125	Faston	0.25"	UL/CSA/VDE	1.06	1.06	0.70	0.85	.79	.69	.59
2189572	Adam Tech	NEMA-5-1-B	AC pwr inlet, NEMA fem, straight GND pin (snap-in)	10	15	125	Faston	0.25"	UL/CSA/VDE	1.06	1.06	0.70	0.85	.99	.85	.69
2114095	Adam Tech	NEMA-5-2*	AC power outlet, NEMA receptacles (snap-in)	10	15	125	Fork	0.25"	UL/CSA/VDE	1.063	1.063	0.70	0.866	.99	.85	.69
147901	ValuePro	701R	AC power inlet, male (screw flanged)	11	15	250	Faston	0.187"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
16652	ValuePro	JR101	AC power inlet, male (screw flanged)	11	15	250	Faston	0.25"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
2114010	Adam Tech	IEC-A-4	AC pwr inlet, M R/A (screw flanged, PC mount)	12	15	250	Solder	0.071"	UL/CSA/VDE	1.97	0.89	1.06	0.76	.29	.19	.15
2178494	Arndt	EAC-324	AC power inlet, male, straight (screw flanged)	13	15	250	Solder	0.16"	UL/CSA/VDE	1.96	0.89	1.09	1.09	.39	.35	.29
2178515	Arndt	EAC-409	AC power inlet, male (snap-in)	14	15	250	Solder	0.16"	UL/CSA/VDE	1.22	0.94	1.06	0.78	.39	.29	.19
147109	ValuePro	42R02	AC power inlet, male (snap-in)	14	15	250	Faston	0.25"	UL/CSA/VDE	1.23	0.95	1.04	0.77	.99	.89	.75
2095525	Adam Tech	IEC-GS-1-100#	AC pwr inlet, male w/ sw. & fuse folder (snap-in)	18	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	0.77	1.83	2.95	2.75	2.49
1954640	ValuePro	K2415	AC power inlet, female (snap-in)	19	15	250	Faston	0.187"	UL/CSA/VDE	1.38	0.98	1.26	1.10	.39	.35	.25
1954658	ValuePro	K2414	AC power inlet, female (screw flanged)	20	15	250	Faston	0.187"	UL/CSA/VDE	1.97	1.14	1.26	0.95	1.49	1.35	1.19
2157546	Adam Tech	IEC-GS-1-200	AC pwr fused inlet, male w/ switch (snap-in)	18	15	250	Faston	0.187"	UL/CSA/VDE	1.07	1.97	1.06	1.83	2.95	2.59	2.39

† High Performance; Increased filtering; Added bleeded resistor; More safety agencies * For 14-16 AWG wire # Includes spare fuse holder – fuse type 5mm x 20mm (250V)

International Power Cords

- 3-conductor detachable power cords
- Voltage rating: 300V
- Cord color: black (except P/N 2199105 gray)
- BSI: British Standard Institution
- Cord type: H05VVF
- P/N 2202298/2202301 with RFI filter

Part No.	Cross Ref. No.	Country	Agency Approvals	Plug Fig.	Cord Length	Conductors	Pricing 1	10	100
117911	2171H576	Europe	All	1/A	6 ft.	3/0.75mm	$4.95	$4.49	$3.95
2202298	ER71RFI	Europe	All	1/A	10 ft.	3/1.0mm	2.95	2.59	2.29
2199105	H05VV-F	Europe	BSI	2/A	8 ft.	3/1.0mm	4.95	3.95	3.49
174633	21071H5182	UK/Ireland	BSI	2/A	8 ft.	3/1.0mm	6.95	6.25	5.59
2202301	2171RFI10	UK/Ireland	BSI	2/A	10 ft.	3/1.0mm	2.95	2.59	2.29

Fig. 1 (Straight)

Fig. A

Fig. 2
(Right Angle, Fused)

***Web Code: XAQ**

European Agency Approvals

Germany	VDE		France	LCIE	
Austria	OVE		Netherlands	KEMA	
Belgium	CEBEC		Norway	NEMKO	
Denmark	DEMKO		Sweden	SEMKO	
Finland	FIMKO		Switzerland	SEV	

Line Cord w/ Pigtail (Fig. 1) w/ Strain Relief (Fig. 1A)



Laptop Power Cord (Fig. 2)



AC Plug Fan Power Cord (Fig. 3)

Power Cord w/ Pigtail (Fig. 4)

Detachable Power Cord (Fig. 5)

Computer Power Supply Extension Cord (Fig. 6)

Right Angle with Pigtail (Fig. 7)



Right Angle Detachable Power Cord (Fig. 8)

Hospital Grade Power Cord (Fig. 9)

Computer Monitor Power Adapter Cord (Fig. 10)

Detachable Power Strip Saver (Fig. 11)


Example (Fig. 11)



Power Strip Saver II (Fig. 12)


Example (Fig. 12)

Mickey Mouse™ Style Power Cord (Fig. 13)

Plug Detail – Industry Standard Designations


290B

910

386A/386E


150

JAMECO ValuePro 2 & 3-Conductor Fan, Pigtail, Detachable & Hospital Grade Power Cords

- Molded connectors
- Excellent resistance to jacket abrasion
- Voltage rating: 300 volts
- Temperature: -20°C to +60°C

★Web Code: UBF

AWG	Volts	Amps	VA
18	125	10	1250
16	125	12	1500
14	125	15	1875

2-Conductor Line Cords with Pigtail

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	100
124434	ST008	JVP	.16	1	6'	Black	18/2	SPT-2	$2.49	$2.25	$1.95	$1.75
42042	SY-001-R	JVP	.18	1A	6'	Black	18/2	SPT-2	2.95	2.75	2.49	2.25

2-Conductor "8" Style Power Cords for Laptops and Power Supplies

2151195	123855-1	ADT	.15	2A	3'	Black	18/2	SPT-2	$.95	$.85	$.75	$.65
189587	VW-1	ADT	.30	2A	6'	Black	18/2	SPT-2	2.95	2.69	2.39	2.19

2-Conductor AC Plug Fan Power Cords

1952572	FACS	JVP	.40	3A	6'	Black	18/2	SPT-2	$3.95	$3.59	$3.19	$2.49
1952581	FAC45	JVP	.40	3B	6'	Black	18/2	SPT-2	4.95	4.59	3.95	3.49

2-Conductor "D" Style Power Cord for Laptops and Power Supplies

200791	LL114039	JVP	.30	2B	6'	Black	18/2	SPT-2	$2.49	$2.25	$1.95	$1.75

3-Conductor Power Cords with Pigtail (Unshielded) 290 Plug

38009	17237	JVP	.31	4	6'	Gray	18/3	SVT	$3.79	$3.39	$2.95	$2.79
2158258	17236SR#	JVP	.35	4	6'	Black	18/3	SVT	3.95	3.59	3.25	2.75
37997	17236	JVP	.30	4	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
173810	17405	JVP	.14	4	6'	Gray	18/3	SJT	4.95	4.49	3.95	3.59
159410	17405B	JVP	.37	4	6'	Black	18/3	SJT	4.95	4.49	3.95	3.59
38025	17238	JVP	.42	4	8'	Black	18/3	SVT	5.95	5.49	4.95	4.49
102007	17535B†	JVP	.49	4	10'	Black	18/3	SVT	6.95	6.25	5.95	5.59
196286	LL40378	JVP	.80	4	10'	Black	16/3	SJT	6.95	6.25	5.49	4.49
2217908	00960018	JVP	.41	4	6'	Black	14/3	SJT	8.95	7.95	6.95	6.25
100272	17629B	JVP	.88	4	9'	Black	14/3	SJT	9.95	8.95	7.95	6.95

3-Conductor Detachable Power Cords (Unshielded) 290B/386A Plugs

2081801	17002A	JVP	.36	5	1'	Black	18/3	SVT	$2.95	$2.65	$2.39	$1.95
2082425	17000A	JVP	.35	5	3'	Black	18/3	SVT	3.25	2.95	2.59	2.29
38041	17249	JVP	.37	5	6'	Beige	18/3	SVT	3.49	2.95	2.49	1.95
2202280	17250RFI§	ADT	.36	5	6'	Black	18/3	SVT	3.49	2.95	2.49	1.95
38050	17250	JVP	.36	5	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
132118	17500	JVP	.44	5	6'	Black	18/3	SJT	4.95	4.49	3.95	3.25
2188650	LL81924	ADT	.72	5	8'	Gray	18/3	SJT	3.49	2.95	2.49	1.95
1585637	171096	JVP	.60	5	8'	Black	18/3	SVT	4.95	4.49	3.95	3.59
2202271	17501RFI§	ADT	.55	5	10'	Black	18/3	SVT	4.95	4.49	3.95	3.59
102024	17501V	JVP	.55	5	10'	Black	18/3	SVT	6.95	6.25	5.95	5.49
2145051	177323	JVP	.70	5	15'	Black	18/3	SVT	4.95	3.95	3.49	2.95
2126053	LL76932§	ADT	.52	5	6'	Black	16/3	SJT	3.95	2.95	2.49	1.95
159361	17602	JVP	.52	5	6'	Black	16/3	SJT	5.95	5.39	4.79	4.29
1537230	LL34877	JVP	.72	5	8'	Black	16/3	SJT	7.95	6.95	6.25	5.59
125541	17504	JVP	.72	5	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79
2172981	1181924	ADT	.95	5	10'	Black	14/3	SJT	8.95	7.95	6.95	5.95

#.55" x .62" strain relief †European standard insulation color code §RFI filter on cord

3-Conductor Detachable Power Cords (Shielded) 290B/386A Plugs

161761	17742	JVP	.40	5	6'	Black	18/3	SVT	$4.49	$3.95	$3.59	$2.95

3-Conductor Computer Power Supply Extension Cords (150/386A/910 Plugs)

206172	PEC-3	JVP	.22	6	3'	Black	18/3	SVT	$3.49	$2.95	$2.49	$1.95
319804	LR94903	ADT	.82	6	6'	Gray	18/3	SVT	1.75	1.59	1.35	1.09
28468	PEC	JVP	.36	6	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2133595	PEC-SJT	ADT	.36	6	6'	Black	18/3	SJT	3.49	2.95	2.49	1.95
420224	10W1-02212	JVP	.53	6	12'	Black	18/3	SVT	5.95	5.39	4.79	4.25

3-Conductor Right Angle Detachable Power Cords (Unshielded) 290B/910 Plugs

117357	8120-6177	JVP	.41	8B	6'	Gray	18/3	SVT	$3.95	$3.55	$3.19	$2.79
38077	17250R	JVP	.54	8B	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2099999	E88265	ADT	.82	8A	8'	Black	18/3	SVT	2.25	1.95	1.75	1.59
177384	17507	JVP	.28	8B	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49

3-Conductor Right Angle Detachable Power Cord (Shielded) 290B/910 Plugs

173252	17745	JVP	.16	8B	6'7"	Black	18/3	SVT	$5.95	$5.39	$4.79	$4.25

3-Conductor Hospital Grade Power Cords (green dot)

2227591	0318-120**	JVP	.75	9	10'	Gray	18/3	SJT	$10.95	$9.95	$8.95	$8.25
132011	17006G	JVP	.82	9	10'	Gray	16/3	SJT	10.95	9.95	8.95	7.95

** Right angle

3-Conductor Computer Monitor Power Adapter Cord (150/386 Plugs)

177448	MPC1	JVP	.16	10	1'	Black	18/3	SVT	$2.95	$2.69	$2.39	$2.19

3-Conductor Detachable Power Cord (Power Strip Saver) 290B/386 Plugs

199778	PSS-1	JVP	.16	11	1'	Black	18/3	SVT	$2.95	$2.69	$2.39	$2.15

3-Conductor Power Cord ("Y" Type Power Strip Saver II) 290B/386 (2) Plugs

208347	121-2594	ZTK	.38	12	22"	Black	16/3	SJT	$8.95	$7.95	$7.49	$6.95

3-Conductor "Mickey Mouse" Style Power Supply Cords (2 Prong Plug w/ Ground)

2201560	CMC105	ADT	.40	13	6'	Black	18/3	VCTP	$1.59	$1.45	$1.19	$1.05
1953559	MMFLAT	ADT	.40	13	6'	Black	18/3	SPT-2	2.95	2.59	2.29	1.95
1951123	MMPC	JVP	.40	13	6'	Black	18/3	SVT	2.95	2.59	2.29	1.95

*Thermoplastic Cord Jacket Type: **SPT-2 (Flat):** Junior duty; **SVT (Round):** Light service; **SJT (Round):** Junior service

BEST SELLING AC-to-DC MEDICAL TABLE-TOP POWER SUPPLIES

Part No.	Power (W)	VDC / Amps	1	10
2179606	15	6 / 2.5	$15.95	$14.49
230683	15.6	12 / 1.3	34.95	29.95

2179606

* JVP = Jameco ValuePro | ADT = Arndt Electronics | ZTK = Ziotek

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Open-Frame Switching AC-to-DC Power Supplies

- Universal AC input/full range
- Short-circuit, overload and overvoltage protection
- Two-year warranty
- † **PFC Model:** • Built-in active Power Factor Correction function, power factor >0.93
- Three-year warranty

For special versions and large quantities, call us at 1-800-831-4242

PS-25

LPP-150

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	Certification	Pricing: 1	Pricing: 10
***3.3-5.5V Web Code: OFI**		***7.5-13.8V Web Code: OTW**	**Single Output**						***15-24V Web Code: OFT**			**27-54V Web Code: OFE**		
2188692	TDK-Lambda	ZWS5-5	+5V @ 0-1A	5W	85-265 @ 47-440	3.8x1.8x0.8	3.6x1.5x0.1	120	2.0	1.0	67	UL/CSA/TUV/CE	$7.95	$6.95
2210722	Phihong	PSA25-105	+5V @ 0-4A	20W	100-240 @ 47-63	4.0x3.0x1.3	3.6x2.6x0.16	50	2.0	1.0	70	UL/CSA/VDE	8.95	7.95
2227583	Power One	BLP30-1005G	+5V @ 0-5A	25W	100-250 @ 50-60	4.0x2.0x1.0	3.7x1.7x0.15	100	2.0	1.0	70	UL/CUL/TUV/CE	9.95	8.95
2227567	Power One	BLP40-1005G	+5V @ 0-5A	25W	100-250 @ 50-60	5.0x3.0x1.0	4.5x2.5x0.16	100	2.0	1.0	70	UL/CUL/TUV/CE	9.95	8.95
212354	Mean Well	PS-25-5	+5V @ 0-5A	25W	100-250 @ 50-60	5.0x3.0x1.0	4.5x2.5x0.16	100	2.0	1.0	70	UL/CUL/TUV/CE	11.95	10.95
217332	Mean Well	PS-45-5	+5V @ 0-8A	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	74	UL/CUL/TUV/CE	12.95	11.49
2210749	Phihong	PSA15LN3-090	+9V @ 0-1.6A	14.4W	100-240 @ 50-60	4.3x1.5x1.0	4.0x1.2x0.15	90	2.0	1.0	65	CUL/CE/TUV	9.95	8.95
2188772	UMEC	UP0401S-09	+9V @ 0-4.4A	40W	90-264 @ 47-63	4.0x3.0x1.0	3.6x2.6x0.2	100	1.0	1.0	70	UL/CSA/TUV	8.95	7.95
2105666	Mean Well	PS-15-12	+12V @ 0-1.25A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.9x0.1	150	0.5	0.5	77	CB/CE	7.49	6.49
2227559	Power One	BLP30-1012G	+12V @ 0-2.1A	25W	100-250 @ 50-60	4.0x2.0x1.0	3.7x1.7x0.15	100	2.0	1.0	70	UL/CUL/TUV/CE	8.95	7.95
148604	Mean Well	PS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	78	UL/CUL/TUV/CE	10.49	9.49
213728	Mean Well	PS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	76	UL/CUL/TUV/CE	12.95	11.49
252401	Mean Well	LPS-50-12	+12V @ 0-4.2A	50.4W	90-264 @ 47-63	7.6x2.1x0.9	7.3x1.7x0.1	80	2.0	1.0	82	UL/CUL/TUV/CE	13.95	12.49
2205413	Astrodyne**	ASM60-1380	+12V @ 0-5A	60W	100-240 @ 50-60	4.0x2.0x1.7	3.7x1.7x0.1	100	3.0	1.0	84	UL/CUL/TUV/CE	7.95	6.95
148639	Mean Well	PS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.15	100	2.0	1.0	79	UL/CUL/TUV/CE	12.75	11.75
2099981	ITE	SBU60-105	+12V @ 0-5.25A	63W	90-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.15	120	3.0	0.5	80	UL/CUL/CE	7.95	6.95
2164674	Mean Well	EPS-65-12	+12V @ 0-6A	72W	90-264 @ 47-63	4.0x2.0x1.1	3.75x1.75x0.13	120	1.0	0.5	86	UL/TUV/EN	12.95	11.95
374089	Mean Well†	PPS-125-12	+12V @ 0-8.5A	102W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	80	UL/CUL/TUV/CE	39.95	36.95
213681	Mean Well†	LPP-150-12	+12V @ 0-12.5A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.15	100	1.0	0.5	79	UL/CUL/TUV/CE	30.95	27.95
2210731	Phihong	PSA25-115	+15V @ 0-1.6A	24W	100-240 @ 47-63	4.0x3.0x1.3	3.6x2.6x0.16	150	2.0	1.0	70	UL/CSA/VDE	8.95	7.95
1919019	Mean Well	PS-35-15	+15V @ 0-2.4A	36W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	150	0.5	0.5	81	UL/CUL/TUV/CE/CB	12.49	11.49
216751	Mean Well	PS-65-15	+15V @ 0-4.2A	63W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	79	UL/CUL/TUV/CE	13.95	11.95
216670	Mean Well†	LPP-100-15	+15V @ 0-6.7A	100W	85-264 @ 47-63	8.7x2.4x1.3	8.3x2.0x0.14	100	0.5	0.5	80	UL/CUL/TUV/CE	19.95	17.95
212346	Mean Well	PS-25-24	+24V @ 0-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	79	UL/CUL/TUV/CE	11.49	10.75
2227575	Power One	BLP40-1024G	+24V @ 0-1.1A	26.4W	100-250 @ 50-60	5.0x3.0x1.0	4.5x2.5x0.16	100	2.0	1.0	70	UL/CUL/TUV/CE	10.95	9.95
213720	Mean Well	PS-45-24	+24V @ 0-1.9A	45.6W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	200	2.0	1.0	78	UL/CUL/TUV/CE	12.95	11.49
148647	Mean Well	PS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	80	UL/CUL/TUV/CE	14.49	12.95
173463	Mean Well†	LPS-100-24	+24V @ 0-4.2A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	80	UL/CUL/TUV/CE	25.95	23.49
2129684	Elpac**	MSM7524	+24V @ 0-4.6A	110W	100-240 @ 50-60	5.7x3.4x1.6	5.2x3.4x1.5	240	3.0	1.0	80	UL/CUL/CE	11.95	10.95
213672	Mean Well†	LPP-150-24	+24V @ 0-6.25A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	150	0.5	0.5	83	UL/CUL/TUV/CE	30.95	27.95
1773419	Astec†	LPS175	+24V @ 0-7.5A	180W	85-264 @ 47-63	8.5x4.2x1.5	7.4x2.5x0.1	150	2.0	1.0	75	UL/CSA/CE	36.95	32.95
668730	Mean Well†	PPS-200-24	+24V @ 0-8.3A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	3.7x7.8x0.14	150	1.0	0.5	89	UL/CUL/TUV/CE	49.95	44.95
2164279	Mean Well†	EPP-300-24	+24V @ 0-12.5A	300W	90-264 @47-63	5.0x3.0x1.4	3.0x2.6x0.137	150	1.0	0.5	92.5	UL/TUV/EN	59.95	53.95
Double Output													**Web Code: OFX**	
212338	Mean Well	PD-25A	+5V @ 0.2-2.5A; +12V @ 0.1-1.5A	30.5W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50;150	1.0	0.5	71	UL/CUL/TUV/CE	$13.95	$12.49
212330	Mean Well	PD-25B	+5V @ 0.2-2A; +24V @ 0.1-1A	34W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50;200	1.0	0.5	77	UL/CUL/TUV/CE	11.49	10.75
194862	Mean Well	PD-45A	+5V @ 0.4-3.2A; +12V @ 0.2-2	40W	90-264 @ 47-440	5.0x2.5x1.5	4.5x2.5x0.2	50;120	3.0	1.0	77	UL/CSA	12.95	11.95
2215697	Artesyn	NLP40-7629J	+5V @ 4A; +12V @ 0-2A	44W	90-264 @ 47-63	4.2x2.5x1.1	4.0x2.2x0.1	50;120	3.0	1.0	75	UL/CSA/CE	10.95	9.95
2197741	Skynet	SNP-N563	+5V @ 1.0-8A; +3.3V @ 0.5-6A	60W	85-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	70	UL	9.95	8.95
194897	Mean Well	PD-65B	+5V @ 0.4-3.5A; +24V @ 0.2-2A	65.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50;150	3.0	1.0	81	UL/CUL/TUV/CE	13.95	12.95
148690	Mean Well	PD-2512	+12V @ 0.1-1.2A; -12V @ 0.1-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	74	UL/CUL/TUV/CE	11.49	10.75
2100857	Mean Well	PD-2515	+15V @ 0-1A, -15V @ 0-1A	30W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	75	UL/CUL/TUV/CE	11.49	10.75
Triple Output													**Web Code: OFX**	
2129676	Elpac**	MSM40D	+5.1V @ 0-4A; +24V @ 0-1A; -12V @ 0.4A	49.2W	100-240 @ 50-60	5.0x3.0x1.1	4.6x2.5x0.2	50	5.0	5.0	70	UL/CUL/CSA/CE	$7.95	$6.95
2210757	Phihong	PSS-40-304	+5V @ 0-4.5A; +15V @ 0-2A; -15V @ 0.5A	60W	100-240 @ 50-60	4.2x2.5x1.2	4.0x2.2x0.1	50; 150;150	3.0	3.0	70	CUL/CE/NEMKO	9.95	8.95
88402	Mean Well	PT-45B	+5V @ 0.4-3A; +12V @ 0.2-2A; -12V @ 0-0.3A	42.6W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50; 120;100	3.0	1.0	75	UL/CUL/TUV/CE	16.95	14.95
216734	Mean Well	PT-65B	+5V @ 0.4-5.5A; +12V @ 0.2-2.5A -12V @ 0-0.5A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 120;100	3.0	1.0	77	UL/CUL/TUV/CE	15.95	14.49
216726	Mean Well	PT-65C	+5V @ 0.4-5.5A; +15V @ 0.2-2A; -15V @ 0-0.5A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 120;100	3.0	1.0	77	UL/CUL/TUV/CE	15.95	14.49
215707	Mean Well	PT-65D	+5V @ 0.5-5A; +12V @ 0.2-4A; +24V @ 0.2-1.3A	104.2W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50; 100;200	2.0	1.0	79	UL/CUL/TUV/CE	15.25	14.25

*Applies only to primary output **Medical rated §Efficiency

Enclosed Switching AC-to-DC Power Supplies

Complete specifications available online

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

SP-150

HRPG-150

HRP-300

RSP-1500

NES-75


SE-600

★2.5-4.2V Web Code: ENT

★5-9V Web Code: ENF

★12-13.8V Web Code: ENW

★15-20V Web Code: ENI

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	PFC	Certification	Pricing 1	Pricing 10
Single Output													
2106685	Mean Well	RS-15-3.3	+3.3V @ 0-3A	9.9W	2.5 x 2.0 x 1.1	80	2.0	0.5	72	—	UL/CUL/TUV/CE/CB	$9.49	$8.49
1919043	Mean Well	RS-15-5	+5V @ 0-3A	15W	2.5 x 2.0 x 1.1	80	1.5	0.5	77	—	UL/CUL/TUV/CE/CB	9.49	8.49
323282	Mean Well	RS-25-5	+5V @ 0-5A	25W	3.1 x 2.0 x 1.1	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	11.49	10.49
323388	Mean Well	RS-50-5	+5V @ 0-10A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	14.49	12.95
323708	Mean Well	RS-100-5	+5V @ 0-16A	80W	6.3 x 3.8 x 1.5	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	22.95	19.95
194791	Mean Well	SP-100-5	+5V @ 0-20A	100W	7.0 x 3.9 x 1.8	100	1.0	0.5	76	✔	UL/CUL/TUV/CE/CB	39.95	35.95
323821	Mean Well	RS-150-5	+5V @ 0-26A	130W	7.8 x 3.9 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	24.95	22.49
123394	Mean Well	S-150-5	+5V @ 0-30A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	34.95	31.95
201912	Mean Well	SP-150-5	+5V @ 0-30A	150W	7.0 x 3.9 x 2.0	100	1.0	0.5	75	✔	UL/CUL/TUV/CE/CB	43.95	39.95
202042	Mean Well	SP-200-5	+5V @ 0-40A	200W	7.0 x 3.9 x 2.0	100	1.0	0.5	71	✔	UL/CUL/TUV/CE/CB	49.95	44.95
244735	Mean Well	SP-320-5	+5V @ 0-55A at 230VAC; 0-44A at 115VAC	275W	8.5 x 4.5 x 2.0	150	1.0	0.5	79	✔	UL/CUL/TUV/CE/CB	63.95	57.95
2172068	Mean Well	RSP-320-5	+5V @ 0-60A	300W	8.5 x 4.5 x 1.2	150	1.0	0.5	85	✔	UL/CUL/TUV/CB/CE	51.95	46.95
2149562	Mean Well	SE-350-5	+5V @ 0-60A	300W	8.5 x 4.5 x 2.0	150	2.0	0.5	78	—	UL/CUL	44.95	40.95
693644	Mean Well	SP-480-5	+5V @ 0-85A	425W	10.9 x 5.0 x 1.7	80	1.0	0.5	79	✔	UL/CUL/TUV/CE/CB	137.95	123.95
374002	Mean Well	SE-600-5	+5V @ 0-100A	500W	9.7 x 5.0 x 2.5	150	2.0	0.5	78	—	UL/CUL	76.95	68.95
394215	Mean Well	SP-320-7.5	+7.5V @ 0-40A	300W	8.5 x 4.5 x 2.0	150	1.0	0.5	83	✔	UL/CUL/TUV/CE/CB	63.95	57.95
1919051	Mean Well	RS-15-12	+12V @ 0-1.3A	15.6W	2.5 x 2.0 x 1.1	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	9.49	8.49
323300	Mean Well	RS-25-12	+12V @ 0-2.1A	25.2W	3.0 x 2.0 x 1.1	120	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	11.49	10.49
123255	Mean Well	S-25-12	+12V @ 0-2.1A	25.2W	3.9 x 3.8 x 1.4	100	0.5	0.5	76	—	UL/TUV/CE	18.95	16.95
323337	Mean Well	RS-35-12	+12V @ 0-3A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	12.95	11.95
323396	Mean Well	RS-50-12	+12V @ 0-4.2A	50.4W	3.9 x 3.8 x 1.4	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	13.49	11.95
123335	Mean Well	S-60-12	+12V @ 0-5A	60W	6.3 x 3.8 x 1.5	120	0.5	0.5	76	—	UL/CUL/TUV/CE/CB	24.95	22.49
323599	Mean Well	RS-75-12	+12V @ 0-6A	72W	5.1 x 3.9 x 1.5	120	0.5	0.5	81	—	UL/CUL/TUV/CE/CB	16.95	15.49
194838	Mean Well	SP-75-12	+12V @ 0-6.3A	75.6W	7.0 x 3.9 x 1.3	80	0.5	0.5	77	✔	UL/CUL/TUV/CE/CB	33.95	30.95
2105017	Mean Well	NES-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	83	—	UL/CUL/CE/CB	18.95	17.49
123386	Mean Well	S-100F-12	+12V @ 0-8.5A	102W	7.8 x 3.9 x 1.5	125	0.5	0.5	80	—	UL/TUV/CE/CB	29.95	27.95
323716	Mean Well	RS-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	81	✔	UL/CUL/TUV/CE/CB	23.95	21.95
194803	Mean Well	SP-100-12	+12V @ 0-8.5A	102W	7.0 x 3.9 x 1.8	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	39.95	35.95
2257782	Mean Well	LRS-150F-12	+12V @ 0-12.5A	150W	6.3 x 3.8 x 1.2	150	0.5	0.5	87.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
123423	Mean Well	S-150-12	+12V @ 0-12.5A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	82	—	UL/CUL/TUV/CE/CB	34.95	31.95
323839	Mean Well	RS-150-12	+12V @ 0-12.5A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	83	—	UL/CUL/TUV/CE/CB	24.95	22.49
173421	Mean Well	SP-150-12	+12V @ 0-12.5A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	43.95	39.95
194774	Mean Well	SP-200-12	+12V @ 0-16.7A	200.4W	7.0 x 3.9 x 2.0	100	0.5	0.5	79	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2101497	Mean Well	SP-240-12	+12V @ 0-20A	240W	7.5 x 3.7 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	49.95	44.95
244743	Mean Well	SP-320-12	+12V @ 0-25A at 230VAC; 0-20A @ 115VAC	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	62.95	56.95
2102203	Mean Well	HRP-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	88	✔	UL/CUL/TUV/CE/CB	72.95	65.95
2149503	Mean Well	SE-350-12	+12V @ 0-29A	348W	8.5 x 4.5 x 2.0	150	1.0	0.5	83	—	UL/CUL	44.95	40.95
2219807	Mean Well	LRS-350-12	+12V @ 0-29A	348W	8.5 x 4.5 x 1.2	150	1.0	0.5	85	—	UL/CUL	35.95	32.95
2094928	Mean Well	SE-450-12	+12V @ 0-37.5A	450W	8.9 x 4.9 x 2.0	200	1.0	0.5	83	✔	UL/CUL	62.95	56.95
301373	Mean Well	SP-480-12	+12V @ 0-40A at 230VAC; 0-36A @ 115VAC	480W	10.9 x 5.0 x 1.7	120	0.5	0.3	85	✔	UL/CUL/TUV/CE/CB	134.95	119.95
374011	Mean Well	SE-600-12	+12V @ 0-50A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	83	—	UL/CUL	76.95	68.95
374214	Mean Well	PSP-600-12	+12V @ 0-50A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	126.95	113.95
319944	Mean Well	SP-750-12	+12V @ 0-62A	744W	10.9 x 5.0 x 2.5	120	0.5	0.3	85	✔	UL/CUL/TUV/CE/CB	199.95	179.95
2101542	Mean Well	SE-1000-12	+12V @ 0-83.3A	999.6W	10.9 x 5 x 2.5	150	0.5	0.5	85	—	UL/CUL	166.95	149.95
694911	Mean Well	RSP-1500-12	+12V @ 0-125A	1500W	10.9 x 5 x 3.3	150	0.5	0.5	87	✔	EN/TUV/UL	304.95	274.95
202025	Mean Well	S-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 4.3 x 2.0	180	0.3	0.3	77	—	UL/CUL/TUV/CE/CB	29.95	26.95
212410	Mean Well	SP-200-13.5	+13.5V @ 0-14.9A	201.1W	7.0 x 3.9 x 2.0	100	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	49.95	44.95
693599	Mean Well	SP-320-13.5	+13.5V @ 0-22A	297W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	62.95	55.95
2106079	Mean Well	PSP-600-13.5	+13.5V @ 0-44.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	85	✔	UL/CUL/TUV/CE/CB	126.95	113.95
2105439	Mean Well†	AD-155A	+13.8V @ 0-11.5A or 13.3V @ 0-0.5A	145W	7.8 x 4.3 x 2.0	150	0.5	0.5	80	✔	UL/CUL/TUV/CE/CB	54.95	48.95
323302	Mean Well	RS-25-15	+15V @ 0-1.7A	25.5W	3.0 x 2.0 x 1.1	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	11.49	10.49
323345	Mean Well	RS-35-15	+15V @ 0-2.4A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	83	—	UL/CUL/TUV/CE/CB	12.95	11.49
323602	Mean Well	RS-75-15	+15V @ 0-5A	75W	5.1 x 3.9 x 1.5	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	16.95	15.49

*Applies only to primary output †UPS function § Efficiency

Continued on next page

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

RS-25



★15-20V Web Code: ENI

★24-30V Web Code: ENE

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%) §	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)													
323724	Mean Well	RS-100-15	+15V @ 0-7A	105W	6.3 x 3.8 x 1.5	120	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	$22.95	$19.95
323847	Mean Well	RS-150-15	+15V @ 0-10A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	24.95	22.49
123432	Mean Well	S-150-15	+15V @ 0-10A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	85	—	UL/CUL/TUV/CE/CB	34.95	31.95
173412	Mean Well	SP-150-15	+15V @ 0-10A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	86.5	✔	UL/CUL/TUV/CE/CB	43.95	39.95
202060	Mean Well	SP-200-15	+15V @ 0-13.4A	201W	7.0 x 3.9 x 2.0	100	0.5	0.5	81	✔	UL/CUL/TUV/CE/CB	50.95	45.95
693610	Mean Well	SP-320-15	+15V @ 0-20A	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	86	✔	UL/CUL/TUV/CE/CB	63.95	57.95
291522	Mean Well	SE-600-15	+15V @ 0-40A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	84	—	UL/CUL	76.95	68.95
694920	Mean Well	RSP-1500-15	+15V @ 0-100A	1500W	10.9 x 5.0 x 3.3	150	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	304.95	274.95
1919078	Mean Well	RS-15-24	+24V @ 0-0.625A	15W	2.5 x 2.0 x 1.1	200	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	9.49	8.49
323311	Mean Well	RS-25-24	+24V @ 0-1.1A	26.4W	3.0 x 2.0 x 1.1	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	11.49	10.49
123272	Mean Well	S-25-24	+24V @ 0-1.1A	26.4W	3.9 x 3.8 x 1.4	100	0.5	0.5	80	—	UL/TUV/CE	18.95	16.95
323353	Mean Well	RS-35-24	+24V @ 0-1.5A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	11.49	10.49
123319	Mean Well	S-40-24	+24V @ 0-1.8A	43W	5.1 x 3.9 x 1.5	100	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	19.95	18.95
323417	Mean Well	RS-50-24	+24V @ 0-2.2A	52.8W	3.9 x 3.8 x 1.4	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	14.49	12.95
123352	Mean Well	S-60-24	+24V @ 0-2.5A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	24.95	22.49
323620	Mean Well	RS-75-24	+24V @ 0-3.2A	76.8W	5.1 x 3.9 x 1.5	120	0.5	0.5	85	—	UL/CUL/TUV/CE/CB	16.95	15.49
323732	Mean Well	RS-100-24	+24V @ 0-4.5A	108W	6.3 x 3.8 x 1.5	120	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	23.95	21.95
201971	Mean Well	S-100F-24	+24V @ 0-4.5A	108W	7.8 x 3.9 x 1.5	150	0.5	0.5	83	—	UL/TUV/CE/CB	29.95	27.95
173404	Mean Well	SP-150-24	+24V @ 0-6.25A	150W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	42.95	37.95
2257803	Mean Well	LRS-150F-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.2	200	0.5	0.5	89	—	UL/CUL/TUV/CE/CB	22.95	20.95
123450	Mean Well	S-150-24	+24V @ 0-6.5A	156W	7.0 x 4.3 x 2.0	240	0.2	0.2	85	—	UL/CUL/TUV/CE/CB	31.95	29.95
323855	Mean Well	RS-150-24	+24V @ 0-6.5A	156W	7.8 x 3.9 x 1.5	120	0.5	0.5	86	—	UL/CUL/TUV/CE/CB	24.95	22.49
2101868	Mean Well	HRP-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	45.95	41.95
2094864	Mean Well	HRPG-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.3	87	✔	UL/CUL/TUV/CE/CB	52.95	47.95
194782	Mean Well	SP-200-24	+24V @ 0-8.4A	201.6W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	49.95	44.95
2101518	Mean Well	SP-240-24	+24V @ 0-10A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	49.95	44.95
196657	Mean Well	S-320-24	+24V @ 0-12.5A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	86	—	UL/CUL	64.95	59.95
244752	Mean Well	SP-320-24	+24V @ 0-13A	312W	8.5 x 4.5 x 2.0	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	62.95	55.95
2102220	Mean Well	HRP-300-24	+24V @ 0-14A	336W	7.7 x 4.1 x 1.6	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	72.95	65.95
2094881	Mean Well	HRPG-300-24	+24V @ 0-14A	336W	7.8 x 4.1 x 1.6	150	0.5	0.3	87	✔	UL/CUL/TUV/CE/CB	82.95	74.95
2146564	Mean Well	SE-350-24	+24V @ 0-14.6A	350.4W	8.5 x 4.5 x 2.0	150	0.5	0.5	87	—	UL/CUL	44.95	40.95
2101606	Mean Well	SE-450-24	+24V @ 0-18.8A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	86	—	UL/CUL	62.95	56.95
2122335	Mean Well	HRP-450-24	+24V @ 0-18.8A	451.2W	8.6 x 4.1 x 1.6	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	111.95	101.95
301322	Mean Well	SP-480-24	+24V @ 0-20A	480W	10.9 x 5.0 x 1.7	150	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	134.95	114.95
147054	Mean Well	SP-500-24	+24V @ 0-20A	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	85.5	✔	UL/CUL/TUV/CE/CB	139.95	124.95
2197994	Mean Well	RSP-500-24	+24V @ 0-21A	504W	9.1 x 5.0 x 1.6	150	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	94.95	84.95
295902	Mean Well	SE-600-24	+24V @ 0-25A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	87	—	UL/CUL	76.95	68.95
374231	Mean Well	PSP-600-24	+24V @ 0-25A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	86	✔	UL/CUL/TUV/CE/CB	126.95	113.95
2204787	Mean Well**	MSP-600-24	+24V @ 0-27A	648W	8.6 x 4.1 x 2.5	150	0.5	0.2	88	✔	UL/CUL/CB/CE	154.95	139.95
2100961	Mean Well	HRP-600-24	+24V @ 0-27A	648W	8.6 x 4.1 x 2.5	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	115.95	105.95
320048	Mean Well	SP-750-24	+24V @ 0-31.3A	751.2W	10.9 x 5.0 x 2.5	120	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	204.95	189.95
2172121	Mean Well	RSP-750-24	+24V @ 0-31.3A	751.2W	9.8 x 5.0 x 1.6	150	0.5	0.5	90.5	✔	EN/TUV/UL	169.95	152.95
1585717	Mean Well	RSP-1000-24	+24V @ 0-40A	960W	11.6 x 5.0 x 1.6	150	0.5	0.5	88	✔	UL/CUL/TUV/CE/CB	207.95	187.95
2101569	Mean Well	SE-1000-24	+24V @ 0-41.7A	1000.8W	10.9 x 5.0 x 2.5	200	0.5	0.5	88	—	UL/CUL	166.95	149.95
694938	Mean Well	RSP-1500-24	+24V @ 0-63A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	304.95	274.95
693513	Mean Well	SP-150-27	+27V @ 0-5.6A	151.2W	7.8 x 3.9 x 2.0	15	0.5	0.5	84	—	UL/CUL/CE/CB/PFC	43.95	39.95
693548	Mean Well	SP-200-27	+27V @ 0-7.5A	202.5W	7.0 x 3.9 x 2.0	150	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	50.95	45.95
693628	Mean Well	SP-320-27	+27V @ 0-11.7A	315.9W	8.5 x 4.5 x 2.0	200	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	63.95	57.95
2149520	Mean Well	SE-350-27	+27V @ 0-13A	351W	8.5 x 4.5 x 3.3	200	0.5	0.5	88	—	UL/CUL	44.95	40.95
190706	Mean Well	SP-500-27	+27V @ 0-18A	486W	6.7 x 4.7 x 3.7	200	0.5	0.5	86.5	✔	UL/CUL/TUV/CE/CB	153.95	138.95
295911	Mean Well	SE-600-27	+27V @ 0-22.2A	599.4W	9.7 x 5.0 x 2.5	150	0.5	0.5	87	—	UL/CUL	76.95	68.95
374257	Mean Well	PSP-600-27	+27V @ 0-22.2A	599.4W	6.7 x 4.7 x 3.7	240	0.5	0.5	86	✔	UL/CUL/TUV/CE/CB	126.95	113.95
374038	Mean Well	SP-750-27	+27V @ 0-27.8A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	205.95	185.95
1585709	Mean Well	RSP-1000-27	+27V @ 0-37.0A	999W	11.6 x 5.0 x 1.6	150	0.5	0.5	88	✔	UL/CUL/TUV/CE/CB	207.95	187.95
694946	Mean Well	RSP-1500-27	+27V @ 0-56A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	304.95	274.95
2146118	Mean Well	AD-155B	+27.6V @ 0-5.5A or 27.1V@ 0-0.5A	152W	7.8 x 4.3 x 2.0	150	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	54.95	48.95
2102473	Mean Well	SP-240-30	+30V @ 0-8A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	88	✔	UL/CUL/TUV/CE/CB	49.95	44.95

*Applies only to primary output **Medical rated § Efficiency

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

★36-54V Web Code: ENH

★Multiple Output WC: ENM

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	EFF (%)§	PFC	Certification	Pricing 1	Pricing 10
Single Output (Continued)													
2102730	Mean Well	SP-320-36	+36V @ 0-8.8A	316.8W	8.5 x 4.5 x 2.0	220	0.5	0.2	87	✔	UL/CUL/TUV/CE/CB	$59.95	$53.95
693206	Mean Well	RS-25-48	+48V @ 0-0.57A	27.4W	3.1 x 2.0 x 1.1	200	0.5	0.5	85	—	UL/CUL/TUV/CE/CB	11.49	10.49
693249	Mean Well	RS-50-48	+48V @ 0-1.1A	52.8W	3.9 x 3.8 x 1.4	200	0.5	0.5	86	—	UL/CUL/TUV/CE/CB	14.49	12.95
693290	Mean Well	RS-100-48	+48V @ 0-2.3A	110.4W	6.3 x 3.8 x 1.5	200	0.5	0.5	84	—	UL/CUL/TUV/CE/CB	23.95	21.95
201930	Mean Well	SP-150-48	+48V @ 0-3.2A	153.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	83	✔	UL/CUL/TUV/CE/CB	43.95	39.95
323863	Mean Well	RS-150-48	+48V @ 0-3.3A	158.4W	7.8 x 3.9 x 1.5	200	0.5	0.5	87	—	UL/CUL/TUV/CE/CB	24.95	22.49
202068	Mean Well	SP-200-48	+48V @ 0-4.2A	201.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	84	✔	UL/CUL/TUV/CE/CB	50.95	45.95
2102481	Mean Well	SP-240-48	+48V @ 0-5A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	50.95	45.95
244770	Mean Well	SP-320-48	+48V @ 0-6.7A	321.6W	8.5 x 4.5 x 2.0	240	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	63.95	57.95
2149554	Mean Well	SE-350-48	+48V @ 0-7.3A	350W	8.5 x 4.5 x 2.0	240	0.5	0.5	87.5	—	UL/CUL	44.95	40.95
2105164	Mean Well	SE-450-48	+48V @ 0-9.4A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	88	—	UL/CUL	62.95	56.95
161796	Mean Well	SP-500-48	+48V @ 0-10A	480W	6.7 x 4.7 x 3.7	300	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	153.95	138.95
301402	Mean Well	SP-480-48	+48V @ 0-11A	528W	10.9 x 5.0 x 1.7	240	0.5	0.2	89	✔	UL/CUL/TUV/CE/CB	137.95	123.95
295929	Mean Well	SE-600-48	+48V @ 0-12.5A	600W	9.7 x 5.0 x 2.5	200	0.5	0.5	88	—	UL/CUL	76.95	68.95
2258398	Mean Well	PSP-600-48-A	+48V @ 0-12.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	87	✔	UL/CUL/TUV/CE	99.95	89.95
374249	Mean Well	PSP-600-48	+48V @ 0-12.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	87	✔	UL/CUL/TUV/CE/CB	126.95	113.95
2101577	Mean Well	SE-1000-48	+48V @ 0-20.8A	998.4W	10.9 x 5.0 x 2.5	200	0.5	0.5	89	—	UL/CUL	166.95	149.95
1585725	Mean Well	RSP-1000-48	+48V @ 0-21.0A	1008W	11.6 x 5.0 x 1.6	150	0.5	0.5	90	✔	UL/CUL/TUV/CE/CB	207.95	187.95
694954	Mean Well	RSP-1500-48	+48V @ 0-32.0A	1536W	10.9 x 5.0 x 3.3	200	0.5	0.5	91	✔	UL/CUL/TUV/CE/CB	304.95	274.95
2106722	Mean Well	RSP-2400-48	+48V @ 0-50A	2400W	10.9 x 7.0 x 2.5	200	0.5	0.5	91.5	✔	EN/TUV/UL	385.95	347.95
2108921	Mean Well	RSP-3000-48	+48V @ 0-62.5A	3000W	10.9 x 7.0 x 2.5	200	0.5	0.5	90.5	✔	UL/CUL/TUV/CE/CB	418.95	376.95
Double Output													
323362	Mean Well	RD-35A	+5V @ 0.3-4A; +12V @ 0.2-1A	32W	3.9 x 3.2 x 1.4	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	$14.49	$13.49
323380	Mean Well	RD-35B	+5V @ 0.3-4A; +24V @ 0.2-1.3A	51.2W	3.9 x 3.2 x 1.4	80	0.5	0.5	82	—	UL/CUL/TUV/CE/CB	14.49	13.49
323433	Mean Well	RD-50B	+5V @ 0.3-6A; +24V @ 0.2-2A	53.6W	3.9 x 3.8 x 1.4	80	0.5	0.5	80	—	UL/CUL/TUV/CE/CB	23.95	21.49
323425	Mean Well	RD-50A	+5V @ 0.3-6A; +12V @ 0.3-3A	54W	3.9 x 3.8 x 1.4	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	23.95	21.49
323505	Mean Well	RD-65A	+5V @ 0.3-8A; +12V @ 0.2-4A	66W	5.1 x 3.9 x 1.5	80	0.5	0.5	79	—	UL/CUL/TUV/CE/CB	19.95	18.49
323513	Mean Well	RD-65B	+5V @ 0.3-8A; +24V @ 0.2-3A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	19.95	18.49
323628	Mean Well	RD-85A	+5V @ 2.0-10A; +12V @ 0.3-5A	88W	6.3 x 3.8 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	37.95	33.49
132397	Mean Well	D-120B	+5V @ 2.0-6A; +24V @ 0.4-4A	126W	7.0 x 3.9 x 2.0	60	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	39.95	36.95
323741	Mean Well	RD-125A	+5V @ 2.0-15A; +12V @ 0.5-10A	130.9W	7.8 x 3.9 x 1.5	80	3.0	1.0	82	—	UL/CUL/TUV/CE/CB	32.95	29.95
2106124	Mean Well	RD-125-1224	+12V @ 1.0-3.7A; +24V @ 0.4-3.7A	133.2W	7.8 x 3.9 x 1.5	120	1.0	0.5	85	—	UL/CUL/TUV/CE/CB	32.95	29.95
323759	Mean Well	RD-125B	+5V @ 2.0-10A; +24V @ 0.4-5A	133.4W	7.8 x 3.9 x 1.5	80	3.0	1.0	82	—	UL/CUL/TUV/CE/CB	29.95	27.95
Triple Output													
323460	Mean Well	RT-50B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	$20.95	$19.49
323468	Mean Well	RT-50C	+5V @ 0-5A; +15V @ 0.2-2A; -15V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	20.95	19.49
323476	Mean Well	RT-50D	+5V @ 0.5-5A; +12V @ 0.1-1A; +24V @ 0.2-1.5A	51W	3.9 x 3.8 x 1.4	80	1.0	0.5	80	—	UL/CUL/TUV/CE/CB	20.95	19.49
123482	Mean Well	T-60B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	61W	6.3 x 3.8 x 1.5	100	1.0	0.5	72	—	UL/CUL/TUV/CE/CB	29.95	26.95
323540	Mean Well	RT-65B	+5V @ 0.5-8A; +12V @ 0.2-3.5A; -12V @ 0-1A	64.6W	5.1 x 3.9 x 1.5	80	1.0	0.5	77	—	UL/CUL/TUV/CE/CB	23.95	21.49
323548	Mean Well	RT-65C	+5V @ 0.5-8A; +15V @ 0.2-3A; -15V @ 0-1A	65.5W	5.1 x 3.9 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	23.95	21.49
323555	Mean Well	RT-65D	+5V @ 0.5-8A; +12V @ 0.1-1A; +24V @ 0.2-2A	68W	5.1 x 3.9 x 1.5	80	1.0	0.5	79	—	UL/CUL/TUV/CE/CB	21.95	19.95
323775	Mean Well	RT-125B	+5V @ 2-15A; +12V @ 0.5-6A; -12V @ 0.1-1A	132W	7.8 x 3.9 x 1.5	80	1.0	0.5	80	—	UL/CUL/TUV/CE/CB	34.95	31.49
323783	Mean Well	RT-125C	+5V @ 2-15A; +15V @ 0.5-6A; -15V @ 0.1-1A	132.5W	7.8 x 3.9 x 1.5	80	1.0	0.5	81	—	UL/CUL/TUV/CE/CB	34.95	31.49
323792	Mean Well	RT-125D	+5V @ 2-15A; +12V @ 0.1-2A; +24V @ 0.4-4A	136W	7.8 x 3.9 x 1.5	80	1.0	0.5	82	—	UL/CUL/TUV/CE/CB	34.95	31.49
Quad Output													
323484	Mean Well	RQ-50B	+5V @ 0.5-6A; +12V @ 0.2-1.5A; -5V @ 0-1A; -12V @ 0-1A	45.5W	3.9 x 3.8 x 1.4	80	0.5	0.5	74	—	UL/CUL/TUV/CE/CB	$21.95	$19.95
323564	Mean Well	RQ-65B	+5V @ 0.5-8A; +12V @ 0.2-3A; -5V @ 0.1-1.5A; -12V @ 0-1A	62.5W	5.1 x 3.9 x 1.5	80	0.5	0.5	76	—	UL/CUL/TUV/CE/CB	20.95	19.95
323572	Mean Well	RQ-65D	+5V @ 0.5-8A; +12V @ 0.2-3A; +24V @ 0.1-1.5A; -12V @ 0-1A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	78	—	UL/CUL/TUV/CE/CB	20.95	19.95
323695	Mean Well	RQ-85D	+5V @ 2-10A; +12V @ 0.3-4A; +24V @ 0.1-1.5A; -12V @ 0-1A	84W	6.3 x 3.8 x 1.5	80	1.0	0.5	78	—	UL/CUL/TUV/CE/CB	31.95	29.95
323812	Mean Well	RQ-125D	+5V @ 2-12A; +12V @ 0.5-4A; +24V @ 0.1-2.5A; -12V @ 0-1A	124W	7.8 x 3.9 x 1.5	80	1.0	0.5	82	—	UL/CUL/TUV/CE/CB	34.95	31.95
213648	Mean Well	QP-150F	+5V @ 3-15A; +15V @ 0-5A; +24V @ 0.4-3A; -15V @ 0-1A	152W	7.8 x 3.9 x 1.5	120	2.0	1.0	78	✔	UL/CUL/TUV/CE/CB	86.95	79.95
213752	Mean Well	QP-200D	+5V @ 3-20A; +12V @ 0-6A +24V @ 0.4-5A; -12V @ 0-1A	204.9W	7.8 x 3.9 x 2.0	100	2.0	1.0	75	✔	UL/CUL/TUV/CE/CB	99.95	89.95
668764	Mean Well	QP-320D	+5V @ 2.5-20A; +12V @ 0-10A; +24V @ 0.2-5A; -12V @ 0.2-2A	316W	8.5 x 4.5 x 2.0	100	2.0	1.0	83	✔	UL/CUL/TUV/CE	119.95	108.95

*Applies only to primary output § Efficiency

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

LED Enclosed Power Supplies

For Indoor and Outdoor Applications

- Suitable for LED lighting and moving sign application
- 100% full-load burn-in test
- Cooling by free air convection
- UL1310 class 2 power unit
- Short-circuit/overload/overvoltage/ overtemperature protection
- Universal AC input/full range

CLG Series

FEATURES	Series						
	APV	CLG	ELN/LPC/LPV/PLN	HLG	LPF	PLC	PLP
Case	Plastic	Metal	Plastic	Metal	Plastic	Plastic	Plastic
Working Temp. (°C)	-30 to 70	-30 to 70	-30 to 50	-30 to 70	-35 to 70	-30 to 50	-30 to 60
Voltage (CV or AV) §	CV	AV	CV	AV	CV	AV	CV
Current (CC or AC) §	AC	AC	CC	CC	CC	AC	CC
Inrush Curr. (A/VAC)	70/230	40/230	40/230	75/230	45/230	40/230	40/230
PFC Function	—	✓	—	✓	✓	✓	✓
Warranty	2 Year	3 Year	2 Year	7 Year	5 Year	2 Year	2 Year

§ **CV:** constant voltage; **AV:** adjustable voltage; **CC:** constant current; **AC:** adjustable current

*2-14.5V Web Code: LTW | *15-23V Web Code: LTF | *24-35V Web Code: LTR | *36-45.6V Web Code: LTS | *48-216V Web Code: LFE

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power (W)	Input Voltage (VAC @ Hz)	Size (L" x W" x H")	Enclosure Rating	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing 1	Pricing 10
2101315	Mean Well	LPC-60-1400	+9-42V @ 0-1.4A	59.5	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	EN/IP/TUV/UL	$15.95	$14.49
2142061	Mean Well	APV-12-12	+12V @ 0-1A	12	90-264 @ 47-63	3.0 x 1.6 x 1.1	—	2.0	1.0	CE	5.95	5.49
2102596	Mean Well	LPV-20-12	+12V @ 0-1.67A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	9.95	8.95
2103142	Mean Well	LPV-35-12	+12V @ 0-3A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	13.95	12.49
2103169	Mean Well	LPV-60-12	+12V @ 0-5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	15.95	14.49
2105308	Mean Well	ELN-60-12	+12V @ 0-5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	25.95	23.49
1918913	Mean Well	PLN-60-12	+12V @ 0-5A	60	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	31.95	28.95
1585805	Mean Well	CLG-100-12	+12V @ 0-5A	60	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	46.95	41.95
2148105	Mean Well	HLG-120H-12B	+12V @ 0-10A	120	90-305 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	0.5	UL/CUL/TUV/CE/PFC	52.95	47.95
2215259	Mean Well	LPV-150-12	+12V @ 0-10A	120	180-305 @ 47-63	7.5 x 2.5 x 1.5	IP67	2.0	1.0	UL/CUL/CE	35.95	32.95
1954877	Mean Well	CLG-150-12A	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	47.95	42.95
2108699	Mean Well	CLG-150-12†	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	47.95	42.95
2137609	Mean Well	HLG-150H-12A	+12V @ 0-12.5A	150	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP65	2.0	0.5	UL/CSA/EN/IP/TUV	53.95	48.95
2102158	Mean Well	HLG-240H-12A	+12V @ 0-16A	192	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	2.0	0.5	UL/TUV/EN/IP	71.95	64.95
2141780	Mean Well	HLG-320H-12A	+12V @ 0-22A	264	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP65	2.0	0.5	UL/CUL/TUV/CB/CE/PFC	104.95	94.95
2122491	Mean Well	PLP-20-24#	+24V @ 0-0.8A	19.2	90-277 @ 47-63	5.5 x 1.3 x 0.8	—	10.0	3.0	UL/CUL/TUV/CE	8.95	7.95
2102799	Mean Well	LPV-35-24	+24V @ 0-1.5A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CE	13.95	12.49
2102801	Mean Well	LPV-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CE	15.95	14.49
2105252	Mean Well	ELN-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	25.95	23.49
1919027	Mean Well	CLG-60-24	+24V @ 0-2.5A	60	90-295 @ 47-63	7.7 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	36.95	33.95
2103871	Mean Well	PLC-100-24	+24V @ 0-4A	96	90-264 @ 47-63	7.9 x 2.7 x 1.4	—	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	41.95	37.95
1585872	Mean Well	CLG-100-24	+24V @ 0-4A	96	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CE/PFC	46.95	41.95
2103433	Mean Well	CLG-150-24	+24V @ 0-6.3A	151.2	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	47.95	42.95
1954885	Mean Well	CLG-150-24A	+24V @ 0-6.3A	151.2	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	47.95	42.95
2136737	Mean Well	HLG-185H-24B	+24V @ 0-7.8A	187.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CULus/TUV/CE/IP	57.95	52.95
2102174	Mean Well	HLG-240H-24A	+24V @ 0-10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/CUL/TUV/CE/PFC	71.95	64.95
2115127	Mean Well	HLG-240H-24B	+24V @ 0-10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	71.95	64.95
2147903	Mean Well	HLG-320H-24	+24V @ 0-13.3A	319.2	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP67	0.5	0.5	UL/CUL/TUV/CB/CE/PFC	104.95	94.95
2141819	Mean Well	HLG-320H-24A	+24V @ 0-13.34A	320	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP65	0.5	0.5	UL/CUL/TUV/CE/CB	104.95	94.95
2148009	Mean Well	HLG-150H-30B	+30V @ 0-5A	150	90-277 @ 50-60	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/TUV/CE/PFC	53.95	48.95
2148025	Mean Well	HLG-150H-36B	+36V @ 0-4.2A	151.2	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	53.95	48.95
2140710	Mean Well	LPF-60-42	+42V @ 0-1.43A	60.06	90-305 @ 47-63	6.4 x 1.7 x 1.3	IP67	0.5	0.5	UL/EN/IP/TUV	28.95	25.95
2101121	Mean Well	LPC-20-350	+48V @ 0-0.35A	16.8	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL	9.95	8.95
2210773	Mean Well	LPF-60D-48	+48V @ 0-1.25A	60	90-277 @ 47-63	6.4 x 1.7 x 1.3	IP67	0.5	0.5	UL/CUL/TUV/CE/CB	29.95	26.95
2189302	Mean Well	HLG-185H-C1400A	+71-143V @ 1.4A	200	90-305 @ 47-63	9.0 x 2.7 x 1.5	IP67	—	1.0	CUL/CSA/EN	57.95	52.95
2189345	Mean Well	HLG-185H-C1400B	+71-143V @ 1.4A	200	90-305 @ 47-63	9.0 x 2.7 x 1.3	IP67	—	1.0	CUL/CSA/EN	57.95	52.95

*Applies only to primary output † Dimmable # Open frame

Mounting Brackets & Accessories for Mean Well Enclosed Switching AC-to-DC Power Supplies

All brackets use metric screws: 2-F3 x 6, 2-F4 x 6, 2-T3 x 6, 2-T4 x 6 and 8-T4 x 6 (not included)

*Web Code: MBM

Part No.	Mfr. P/N	For Models	1	10
222122	DRL-01	S-25/40, RS-25/35	$.99	$.89
222131	DRL-02	S-50/60/100/150, SP-100/150/200, D-120	1.25	1.09
222148	DRL-03A	S-240/320, SP-320	1.35	1.15
222165	DRP-02	S-15/25, SP-75/100/150/200	1.49	1.35
222173	DRP-03	All Models	1.49	1.25
222182	MHS012	S-320/350, SP-100/150/200/320	.49	.39
248736	2094.0	DR, DRH, DRP, DRT, MDR	8.95	7.95



222122 4.35"L x 1.73"W x 2.52"H
222148 7.875"L x 2.48"W x 1.80"H

222165
3.2"L x 2.0"W x 0.3"H

222173
1.75"L x 1.97"W x 0.34"H

222182
.767"L x .60"W x .625"H



248736 (Slotted) DIN Mounting Rail
Length: 1 meter

Mating Connector

103588 $1.90/10
Spade Solderless Terminal

Crimp Tool



72996 $25.95
Solderless Terminal Crimp Tool

DIN-Rail Switching Power Supplies

- Short-circuit, overload, overvoltage protection
- Low cost, high reliability
- 100% full-load burn-in test
- For DIN mounting rail, see page 18

UL-508

- For DIN-Rail terminal blocks
- Universal AC input range
- Soft-start circuit, limiting AC surge current
- Rail not included

★5-13.8V Web Code: DTW

★15-24V Web Code: DTF

★27.6-48V Web Code: DFO

Fig. 1

Fig. 2

Fig. 3


Fig. 4

Fig. 5

Fig. 6

Fig. 7

Fig. 8

Fig. 9

Fig. 10

Fig. 11

Fig. 12

Fig. 13

Fig. 14

Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	Certification	1	10
2103978	MDR-10-5	2	5VDC @ 2A	10	88-264 @ 47-63	0.33A(115V)/0.21A(230V)	3.5 x .89 x 3.9	0.4	UL/CUL/TUV/CB/CE	$11.95	$10.95
2101243	DR-15-5	9	5VDC @ 2.4A	12	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	1.0 x 3.7 x 2.2	0.2	UL/CUL/TUV/CE	13.49	11.95
1943300	MDR-20-5	2	5VDC @ 3A	15	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
212303	DR-4505	3	5VDC @ 5A	25	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.9	UL/CUL/TUV/CE	19.95	17.95
1943393	MDR-40-5	4	5VDC @ 6A	30	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	18.95	16.95
1943449	MDR-60-5	4	5VDC @ 10A	50	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	19.95	17.95
1952978	MDR-10-12	2	12VDC @ 0.84A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	11.95	10.95
2094952	DR-15-12	9	12VDC @ 1.25A	15	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CE	13.49	11.95
1943334	MDR-20-12	2	12VDC @ 1.67A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
373182	DR-30-12	1	12VDC @ 2A	24	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943406	MDR-40-12	4	12VDC @ 3.33A	40	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	18.95	16.95
192699	DR-4512	3	12VDC @ 3.5A	42	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	19.95	17.95
373230	DR-60-12	1	12VDC @ 4.5A	54	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	21.95	19.95
1943457	MDR-60-12	4	12VDC @ 5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	19.95	17.95
212291	DR-75-12	6	12VDC @ 6.3A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	31.95	28.95
1943511	DR-100-12	1	12VDC @ 7.5A	90	85-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	3.9 x 3.7 x 2.2	0.8	UL/CUL/TUV/CE	31.95	28.95
1943481	MDR-100-12	5	12VDC @ 7.5A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	34.95	31.95
212274	DR-120-12	7	12VDC @ 10A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	38.95	34.95
2099366	SDR-120-12†	8	12VDC @ 10A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	51.95	46.95
2101391	DR-15-15	9	15VDC @ 1A	15	88-264 @ 47-63	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CB/CE	12.95	11.49
1943342	MDR-20-15	2	15VDC @ 1.24A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
1952986	MDR-10-24	2	24VDC @ 0.42A	10	85-264 @ 47-63/120-370	0.33A(115V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	11.95	10.95
2100873	DR-15-24	9	24VDC @ 0.63A	15.2	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	2.2 x 1.0 x 3.7	0.2	UL/CUL/TUV/CE	13.49	11.95
1943385	MDR-20-24	2	24VDC @ 1A	24	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	13.95	12.49
373203	DR-30-24	1	24VDC @ 1.5A	36	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	16.95	15.49
1943422	MDR-40-24	4	24VDC @ 1.7A	40.8	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	18.95	16.95
192681	DR-4524	3	24VDC @ 2A	48	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	19.95	17.95
1943465	MDR-60-24	4	24VDC @ 2.5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	19.95	17.95
373246	DR-60-24	1	24VDC @ 2.5A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	21.95	19.95
212282	DR-75-24	6	24VDC @ 3.2A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	31.95	28.95
2190320	SDR-75-24	13	24VDC @ 3.2A	76.8	88-264 @ 47-63	1.4A(115V)/0.85A(230V)	4.0 x 1.25 x 4.9	0.4	UL/CUL/TUV/CE	32.95	29.95
1943490	MDR-100-24	5	24VDC @ 4A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	34.95	31.95
1943537	DR-100-24	1	24VDC @ 4.2A	100.8	88-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	2.2 x 3.9 x 3.7	0.8	UL/CUL/TUV/CE	31.95	28.95
212266	DR-120-24	7	24VDC @ 5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	38.95	34.95
1953727	DRH-120-24	7	24VDC @ 5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	55.95	50.95
2099374	SDR-120-24†	8	24VDC @ 5A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	51.95	46.95
2123055	WDR-120-24	14	24VDC @ 5A	120	180-550 @ 47-63	0.55A(400V)/1.2A(230V)	4.5 x 1.6 x 4.9	0.4	UL/CUL/CB/CE	61.95	55.95
221892	DRP-240-24†	10	24VDC @ 10A	240	85-264 @ 47-63/120-370	2.8A(115V)/1.4A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	59.95	53.95
373123	DRT-240-24	10	24VDC @ 10A	240	3-phase 340-550 @ 47-63/480-780	0.95A(400V)/0.75A(500V)	3.9 x 4.9 x 4.9	2.9	UL/CUL/TUV/CE	69.95	63.95
2081086	SDR-240-24†	8	24VDC @ 10A	240	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	88.95	79.95
252663	DRP-480-24†	11	24VDC @ 20A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	103.95	93.95
295938	DRP-480S-24†	11	24VDC @ 20A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	112.95	102.95
372577	DRT-480-24	11	24VDC @ 20A	480	3-phase 340-550 @ 47-63/480-780	1.7A(400V)/1.3(500V)	8.9 x 5.0 x 3.9	5.5	UL/CUL/TUV/CE	117.95	107.95
2094944	SDR-480-24†	12	24VDC @ 20A	480	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	4.9 x 3.4 x 5.0	4.9	UL/CUL/TUV/CE	144.95	129.95
373131	DRT-960-24	11	24VDC @ 40A	960	340-550 @ 47-63	2A(400V)/1.6A(500V)	10.9 x 3.9 x 4.9	7.3	UL/CUL/TUV/CE	219.95	199.95
1943473	MDR-60-48	4	48VDC @ 1.25A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	19.95	17.95
221866	DR-75-48	6	48VDC @ 1.6A	76.8	85-264 @ 47-63	2A(115V)/ 1.2A(230V)	3.9 x 2.2 x 4.9	1.7	UL/TUV/CE	31.95	28.95
221904	DR-120-48	7	48VDC @ 2.5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	38.95	34.95
2107338	SDR-120-48	8	48VDC @ 2.5A	120	88-264 @ 47-63	1.4A(115V)/0.7A(230V)	4.9 x 1.6 x 4.5	1.5	UL/CUL/TUV/CB/CE	51.95	46.95
221883	DRP-240-48†	10	48VDC @ 5A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	59.95	53.95
2094936	SDR-240-48†	8	48VDC @ 5A	240	88-264 @ 47-63/120-370	2.6A(115V)/1.3A(350V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	88.95	79.95
301306	DRP-480S-48†	11	48VDC @ 10A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	112.95	102.95
2107346	SDR-480-48	12	48VDC @ 10A	480	90-264 @ 47-63	5A(115V)/2.5A(230V)	4.9 x 3.4 x 5.1	3.5	UL/CUL/TUV/CB/CE	144.95	129.95

*Switch selectable †With Power Factor Correction

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

3 LEVELS OF SAVINGS
NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

40A DC DIN-Rail UPS Module & 20A Power Supply Redundancy Module

★Web Code: DTF

Part No.	Mfr. Part No.	Description	DC Input/DC BUS	Output Voltage @ Current	Charge Current	Certification	1	10
2103273	DR-UPS40	Battery controller for UPS	24-29V @ 40A	21-29VDC @ 0-40A	2A	CE	$40.95	$36.95
2105009	DR-RDN20	2-input redundancy module	21-28V @ 20A	30V @ 20A	—	CE	24.95	22.49

2103273 (Rail not included)

15 to 350-Watt Enclosed Converters

★5-9V Web Code: IDF ★12V Web Code: IDW ★15-24V Web Code: IDR ★30-48V Web Code: IDO

- 2:1 wide input range
- Working temp.: -10˚C to +60˚C
- 100% burn-in tes
- Protection: short-circuit, overload and overvoltage



SD-150

SD-15 Series • Built-in EMI filter, low ripple noise • One-year warranty

SD-25/SD-50/SD-150 Series • Isolation voltage: 1500VDC • Built-in EMI filter, low ripple noise • One-year warranty

SD-200 Series • Isolation voltage: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • One-year warranty

SD-350 Series • Isolation voltage: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • Two-year warranty

SD-500 Series • Isolation voltage: 2000VAC • DC input active surge current limiting • Wide 4:1 ~ 2:1 SC input range • Forced air cooling by built-in DC fan with fan speed control function • Three-year warranty

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Power (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
1953778	SD-15A-5	9.2-18V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	$12.49	$11.49
1953786	SD-15B-5	18-36V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	12.49	11.49
175662	SD-25A-5	9-18V	+5V @ 5.0A	25	3.9 x 3.8 x 1.4	5	0.5	0.5	100	CE	20.95	18.95
212549	SD-50A-5	9-18V	+5V @ 10A	50	6.3 x 3.8 x 1.5	5	0.5	0.5	100	CE	25.95	23.49
1953823	SD-15B-12	18-36V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	12.49	11.49
1953840	SD-15C-12	36-72V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	12.49	11.49
175805	SD-25A-12	9-18V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	20.95	18.95
1537483	SD-50A-12	9.2-18V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	25.95	23.49
212531	SD-50B-12	19-36V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	25.95	23.49
212506	SD-50C-12	36-72V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	25.95	23.49
217270	SD-150B-12	19-36V	+12V @ 12.5A	150	7.8 x 4.3 x 2.0	7	0.5	0.5	120	CE	42.95	38.95
1953920	SD-200C-12	36-72V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	CE	70.95	63.95
1954033	SD-500L-12	19-72V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	CE	128.95	115.95
175813	SD-25A-24	9-18V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	20.95	18.95
2107266	SD-50A-24	9.2-18V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	25.95	23.49
212514	SD-50B-24	19-36V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	25.95	23.49
2107039	SD-100C-24	36-72V	+24V @ 4.2A	100.8	7.8 x 3.9 x 1.6	7	0.2	0.2	150	CE	32.95	29.95
2107098	SD-150C-24	36-72V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	CE	42.95	38.95
1953954	SD-200B-24	19-36V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	70.95	63.95
1953911	SD-200B-48	19-36V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	70.95	63.95
1953989	SD-350B-48	19-36V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	85.95	77.95

Encapsulated DC-to-DC Converters

★3.3-9V Web Code: IEF ★12-13.5V Web Code: IEW ★15-24V Web Code: IEO

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Shield metal case
- 2:1 wide input range
- Cooling by free air convection
- One-year warranty

SLW05

SKE10

DKE10

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Pwr (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 10
213234	SLW05C-05*	36-72V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	$11.95	$10.95
216962	SKE10A-05*	9-18V	+5V @ 2A	10	2.0 x 1.0 x 0.44	5	0.3	1.0	50	CE	18.95	16.95
155716	SKE15A-05*	9-18V	+5V @ 3A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	50	CE	18.95	16.95
155708	SKE15A-12*	9-18V	+12V @ 1.25A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	60	CE	16.49	15.49
155695	SKE15A-24*	9-18V	+24V @ 0.625A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	80	CE	18.95	16.95
161702	DCW03A-12**	9-18V	±12V @ 0.125A	15	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	9.95	8.95
217092	DKE10A-12**	9-18V	±12V @ 0.42A	5.04	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49
217112	DKE10A-15**	9-18V	±15V @ 0.333A	5.0	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	18.95	17.49

*Single output **Double output

DC-to-AC Inverters Pure and Modified Sine Waves

★Web Code: XEL

NEW MARKED IN PINK

Part No.	Mfr. Part No.	Input Range (VDC)	Output (VAC)	Wattage (W)	Efficiency) (%)	LED Indicator	Size (L" x W" x H")	Pricing 1	Pricing 10
277181	A-301-150-B2	10-15	120	150	78	Yes	4.8 x 2.9 x 1.8	$39.95	$35.95
2228316	PWRI18012S*	10-16.2	120	180	90	Yes	5.9 x 3.2 x 1.5	29.95	26.95
2108445	TS-200-112A	10.5-15	120	200	86	Yes	8.0 x 6.2 x 2.3	134.95	119.95

*Cigarette plug not included (recommend P/N 2228332)



277181

AC-to-DC Regulated Switching Wall Adapters

AC-to-DC Wall Adapters on pages 2-6

These regulated switching wall adapters are perfect for applications that need precise rail voltages. Whether it's charging on the go or for home applications, these adapters are reliable and cost-effective. Slimline versions available to save you space on your surge protector.

★AC-DC Wall Adapters Web Code: CDZ

★AC-DC Slimline Web Code: CBQ

Part No.	Mfr.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
2135451	MG Electronics	LFS054000D-8AS*	5V @ 4A	20	2.1 x 5.5mm R/A	3.3 x 2.0 x 1.5	$10.95	$9.95
252753	ReliaPro	S08AB09005001*	9V @ 0.5A	4.5	2.1 x 5.5mm	2.5 x 1.1 x 1.7	10.95	9.95
252824	ReliaPro	S15AC12010001*	12V @ 1A	12	2.1 x 5.5mm	2.2 x 1.4 x 3.0	12.95	11.49
1950497	ReliaPro	GQ30-120200-BU*	12V @ 2A	24	2.1 x 5.5mm	2.9 x 1.3 x 1.7	15.95	14.49
2082134	ReliaPro	ST-122A	12V @ 2A	24	Screw terminals	3.8 x 2.1 x 1.6	14.95	13.49
2076341	ReliaPro	S15AD24006201L5260*	24V @ 0.63A	15.1	2.1 x 5.5mm	2.9 x 1.3 x 2.2	11.95	10.95
1953671	ReliaPro	MPC-2400107	24V @ 1A	24	2.5 x 5.5mm	3.4 x 2.7 x 2.2	14.95	13.49
2167613	ReliaPro	ST-242A	24V @ 2A	48	Screw terminals	3.8 x 2.1 x 1.6	15.95	14.95

*Slimline

2135451

AC-to-AC Wall Adapters

AC-to-AC Wall Adapters on page 2

If your devices are powered by AC current, these wall warts are exactly what you need. With a big range of voltages at great prices, check out our full line of AC to AC wall adapters and decide the right one for you. These power bricks are regulated, giving you the accurate rail voltages you wish for.

★Web Code: ABQ

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Size (L" x W" x H")	1	10
100061	ACU090050	9V @ 0.5A	4.5	2.1 x 5.5mm	2.7 x 1.9 x 1.7	$8.95	$7.95
2167576	AM-121200A	12V @ 1.2A	15	2.1 x 5.5mm R/A	3.2 x 2.1 x 1.9	7.95	6.95
2197581	GPU481202000WA0O	12V @ 2A	24	2.1 x 5.5mm	3.3 x 2.6 x 2.2	14.95	13.49
2227604	GPU481202000WA0O-25	12V @ 2A	24	2.5 x 5.5mm	3.3 x 2.6 x 2.2	14.95	13.49
2217916	218054	18V @ 0.5A	9	2.1 x 5.5mm	2.7 X 2.0 X 1.7	7.95	6.95
2179622	AFU180200	18V @ 2A	36	2.1 x 5.5mm	3.4 x 2.7 x 2.1	12.95	11.95
2217721	ZMCE-022	24V @ 1A	24	2.5 x 5.5mm	3.2 x 2.2 x 1.9	9.95	8.95
2227639	GPU572401500WA00	24V @ 1.5A	36	2.5 x 5.5mm	3.3 x 2.6 x 2.2	14.95	13.49

100061

HRP Series Enclosed Single Output Switching Power Supplies

Enclosed Power Supplies on page 15-17

The G5 series from Mean Well has a built-in PFC function with short circuit, overload, over voltage and over temperature protections that ensure its five year life cycle. It also has a built-in constant current limiting circuit, remote sense function, LED ON indicator and cooling fan with ON/OFF controls for a fully featured power supply. Get the most out of your power supply with this popular model.

★Web Code: EPS

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Load Reg. (%)	Line Reg. (%)	Efficiency (%)	1	10
2100793	HRP-600-3.3	3.3V @ 120A	396	±1.0	±0.5	78.5	$115.95	$105.95
2102203	HRP-300-12	12V @ 27A	324	±0.5	±0.3	88	72.95	65.95
2101868	HRP-150-24	24V @ 6.5A	156	±0.5	±0.2	88	45.95	41.95
2102220	HRP-300-24	24V @ 14A	336	±0.5	±0.2	87	72.95	65.95
2122335	HRP-450-24	24V @ 18.8A	451.2	±0.5	±0.2	88	111.95	101.95
2100961	HRP-600-24	24V @ 27A	648	±0.5	±0.2	88	115.95	105.95

HRP-300

AC/DC Power Jacks, Plugs and Adapters

Power Jacks, Plugs & Adapters on page 9

For projects that need power, these power jacks are exactly what you need for your applications to come alive. Whether for PCB or panel, there are different types of power jacks for mounting, as well as terminals. For every power jack, there is a power plug that fits perfectly into them. Find the right plug or adapter of the correct size and shape to connect to your power enabled devices with our selection.


Circuit 1


Circuit 2

Power Jacks

★Web Code: BAM

Part No.	Cross Ref. No.	Pin Dia. x OD	L x Dia. (mm)	Type	Mounting	Circuit	Terminal	1	10	100
151555	JX16183	2.1 x 5.5mm male	21.0 x 8.0	1	Panel	1	Solder eyelet	$1.75	$1.59	$1.39
159611	PJ1014A	2.1 x 5.5mm male	57.5 x 12.6	2	Panel & PCB	2	Solder eyelet	1.95	1.75	1.49
151563	DPJ-026A	2.5 x 5.5mm male	15.1 x 8.0	1	Panel	1	Solder eyelet	1.95	1.75	1.49
202358	HD2388	2.5 x 5.5mm male	12.4 x 7.7	3	Panel	2	Solder eyelet	1.19	.99	.89

Type 1

Type 2

Type 3

Power Plugs and Adapter

★Web Code: MFP

Part No.	Cross Ref. No.	Description	Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
28760	PP049	F plug (P205)	2.1 x 5.5 x 9.5	4.1 x 12 (black)	$1.29	$1.15	$.89
138587	PL-007	F plug, right angle	2.1 x 5.5 x 12 (right angle)	2.8 x 11 (black)	.89	.79	.65
231176	AP-340	M plug, stereo	— x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	1.15	1.05	.95
1953591	DCJ2.1-DCP2.5	Adapter, 2.1mm male to 2.5mm female (1.4"L)			1.49	1.25	1.09

28760

138587

231176

1953591

★For additional products, availability and specifications visit Jameco.com and enter the Web Code in the product search box

JAMECO® ELECTRONICS
1355 Shoreway Rd., Belmont, CA 94002-4100

Toll-Free Ordering and Customer Support:
Domestic: 1-800-831-4242 / International: 1-650-592-8097
Domestic Fax: 1-800-237-6948 / International Fax: 1-650-592-2503
Website: http://www.Jameco.com / Email: Info@Jameco.com

PRESORTED STANDARD
U.S. POSTAGE PAID
JAMECO ELECTRONICS

Customer Number

Like our catalog, we have even more products on our website

Scan on your smartphone with a code reader app.

If you would like to unsubscribe from Jameco's catalog please visit www.Jameco.com/CatalogUnsubscribe

Printed in USA

Thousands of Power Products To Choose From

GST Series AC-to-DC High Reliability Industrial Table-Top Power Supplies

Table-Top Power Supplies on pages 6-8, 10

★Web Code: DDZ

The GST series is the successor to the GS, improving from Level V to Level VI energy efficiency to help save energy that lowers power consumption, resulting in money saved in your pocket. With a wide range of wattages, several different types of devices can be powered including heavy-duty applications.

- Fanless design
- Class I power (with earth pin)
- LED indicator for power on
- Universal AC input/full range
- Load regulation: ±3%
- Three-year warranty
- 3 pole AC inlet
- Line regulation: ±1%

GST Series

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Output Connector	Efficiency (%)	1	10
2224307	GST40A12-P1J	12V @ 3.34A	40	2.1mm x 5.5mm **F**	89.5	$16.95	$15.49
2224382	GST60A12-P1J	12V @ 5A	60	2.1mm x 5.5mm **F**	89.5	18.95	16.95
2224411	GST60A24-P1J	24V @ 2.5A	60	2.1mm x 5.5mm **F**	89.5	18.95	16.95
2223494	GST90A24-P1M	24V @ 3.75A	90	2.5mm x 5.5mm **F**	90.0	29.95	26.95
2223611	GST120A24-R7B	24V @ 5A	120	4-pin DIN **M**	90.5	43.95	39.95

Power Cords

Power Cords on pages 6, 12 & 13

★Web Code: UBF

Power supplies need to receive energy from the outlet to power up your devices. They cannot do that without the help of the trusty power cord. Find the correct cord to your power supply and device with our wide selection and great prices. All cords are 6 feet long with 18AWG.

189587

Part No.	Cross Ref. No	Description	1	10	50	100
38050	17250	3-conductor SVT AC power cord, black	$4.95	$4.49	$3.95	$3.59
189587	VW-1	2-conductor Figure 8 style SPT-2 power cord, black	2.95	2.69	2.39	2.19
159410	17405B	3-conductor SJT power cord with pigtail (unshielded), black	4.95	4.49	3.95	3.59
124434	ST008	2-conductor SPT-2 power cord with pigtail, black	2.49	2.25	1.95	1.75
2158258	17236SR	3-conductor SVT power cord with pigtail (unshielded), black	3.95	3.59	3.25	2.75
28468	PEC	3-conductor SVT power cord with protected plug, black	3.95	3.55	3.19	2.79
161761	17742	3-conductor detachable SVT power cord (shielded), black	4.49	3.95	3.59	2.95

RPS-60 Series Open-Frame Medical Power Supplies

Open-Frame Power Supplies on page 14

These highly reliable, open frame power supplies are perfect for patient contact medical system equipment such as oral irrigators or sleep apnea devices. It's passed the stringent medical certifications with low leakage current of less than 200μA. Have your medical instruments powered up today with this series.

★Web Code: OSP

- 4" x 2" miniature size
- No load power consumption < 0.75W
- Protections: short circuit, overload, over voltage
- Fixed switch frequency at 100kHz
- Cooling by free air convection
- Three-year warranty

RPS-60

Part No.	Mfr. Part No.	Voltage @ Current	Power (W)	Load Reg. (%)	Line Reg. (%)	Efficiency (%)	1	10
2106360	RPS-60-3.3	3.3V @ 10A	36.3W	±1.0	±0.5	74	$14.49	$12.95
2106386	RPS-60-5	5V @ 10A	50W	±1.0	±0.5	79	14.49	12.95
2106335	RPS-60-12	12V @ 5A	60W	±1.0	±0.5	83	14.49	12.95
2106343	RPS-60-15	15V @ 4A	60W	±1.0	±0.5	84	14.49	12.95
2106351	RPS-60-24	24V @ 2.5A	60W	±1.0	±0.5	85	14.49	12.95
2106378	RPS-60-48	48V @ 1.25A	60W	±1.0	±0.5	86	14.49	12.95

Will Call Office Hours
Monday – Friday 8 am to 5 pm

Contact Information

Order Desk
Phone: 1-800-831-4242
Fax: 1-800-237-6948
E-mail: Sales@Jameco.com

Technical Support
Phone: 1-800-831-4242
E-mail: Tech@Jameco.com

Customer Service
Phone: 1-800-536-4316
E-mail: CustService@Jameco.com

Credit Department
Phone: 650-592-8097
Fax: 650-802-1583
E-mail: Credit@Jameco.com

International Order Desk
Phone: 650-592-8097
Fax: 650-592-2503
E-mail: International@Jameco.com

Feedback
E-mail: Feedback@Jameco.com

The Jameco RobotStore
Website: www.RobotStore.com

Club Jameco
Website: www.ClubJameco.com